

Norcold 1200 1201

Gas/Electric

INSTALLATION MANUAL



Jr and Jeremy Lambright

info@jc-refrigeration.com www.jc-refrigeration.com

Tools needed to do the install:

Screw gun 5/16 ¼ Phillips wrench putty knife knife caulk gun zip ties



And enough time to think things thru at times, so don't give up and hang in there to the end it will be all worth it. A cold fridge is about to be had!!



We at JC Refrigeration try to build these units so that they are able to be installed by DIY customers. But please be aware though that our upgrades might not look quite the same. Some brackets, frames, mounting holes might not always line up perfectly as fridge boxes can vary at times. So, some modifications, such as shaving foam or tweaking frames might need to be done at times to install the unit. Something to remember is that these cooling units are built with steel tubes and steel plates so some minor twisting or pushing to get the unit installed will not harm the cooling unit. We offer videos for the gas/electric versions and install manuals for the HVAC units to help you through this install. Feel free to send us a picture along with your question, and we will help you to the best of our ability.

JR & Jeremy Lambright

Please read through these notes before starting:

- **Pages #4 thru 25:** cooling unit removal and unhooking board from box
- **Pages #26 & 27:** Fin fan installation
- **Pages #28 thru 35:** LP burner & heating element removal, new installation
- **Pages #36:** Thermal Mastic installation
- **Pages #37 thru 40:** New cooling unit installation into box
- **Pages #41 thru 43:** Apply foam and tape
- **Pages #44 thru 46:** Board etc. hookup,
- **Pages #47 thru 51:** Ice maker hook up
- **Pages #52 thru 54:** Vent fan position, and unit leveling
- **Pages # 55 thru 57:** Slideout fan and top vent cap info
- **Pages 58 thru 65:** final installation info
- **Page #66 to the end:** Trouble Shooting, FAQs
- Check your rear control board to make sure it matches up to this board in this manual, if it does not then a good chance you have the 1210 Style Norcold which has a smaller style board then this 1200 style
- Throughout this manual, there will times when you see (RA), (YA), or (BA). These are referring to red arrow, yellow arrow, and blue arrow. We use these to point to a certain spot or part in the pictures.
- There are some differences between this install manual and DIY install videos on YouTube. So, to avoid confusion, follow **only** the instructions in this manual.
- It a good idea to know where your fridge 12V DC fuse is located just in case you need to get to it in this process.
- Before you take any wires apart its always a great idea to take pics of how they were. That makes it nice to look back in case something is not quite clear.
- Below is a picture of each style so make sure that you follow the directions for the style board that matches yours.

1200-Style



1210-Style



To start this process, begin by taking the cooling unit out of the box, if box appears to be damaged don't panic as we foam package them into the box and so the box can be beat up a bit and the unit is still not damaged. So, when you take the box apart you will notice a spray foam packing inside and so this needs to be removed and then the unit will slide out. Inside the box you should have the cooling unit, and parts needed to do the install.



Cover up your floor with blankets and removing any door handles or smoke alarms that might hinder the exit of your refrigerator from your cabinet. Turn off the water pump (if you have an ice maker in your fridge) and the refrigerator control panel.




WARNING:

Make sure to turn off LP gas at the tank before starting the install.




Locate the side vent to your refrigerator. Take the main 12V wires (**RA**) loose from your board. The wire colors will vary from coach to coach. **Note:** If your wire ends are not insulated, wrap the end in electrical tape so you don't blow the fuse.

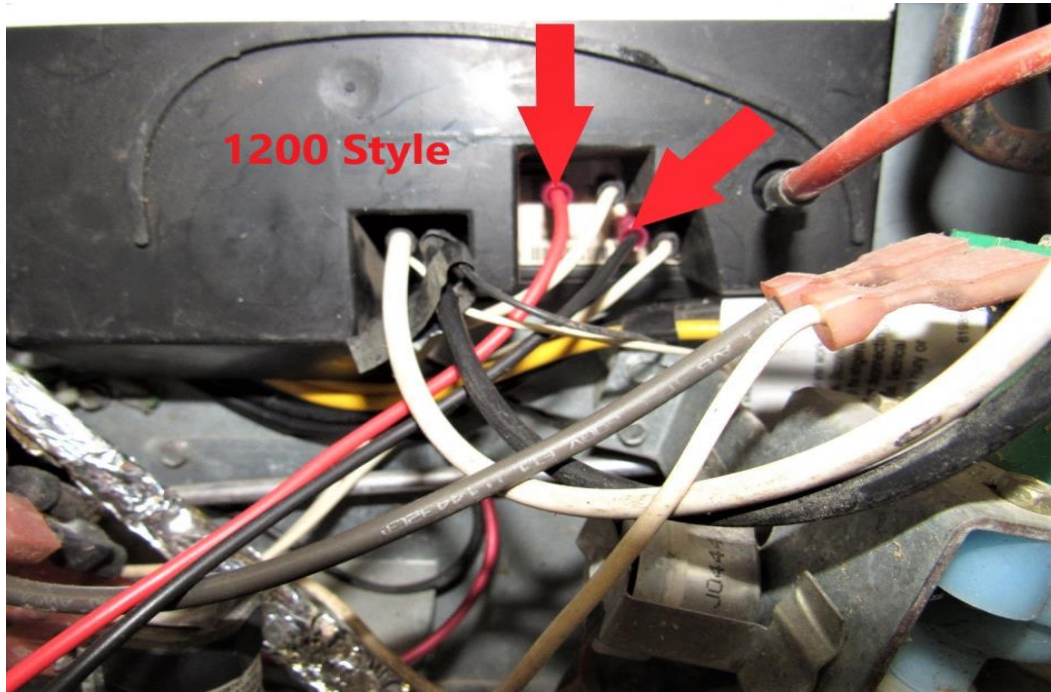

Unplug your 120v plug (**RA**) from your RV. Location will vary from coach to coach, if you have an icemaker unplug its cord from wall socket, making sure water pump is turned off unscrew water supply line from solenoid (**RA**).



Using 2 wrenches remove the LP line (RA) off of the LP solenoid valve. **Make sure LP gas is turned off.**

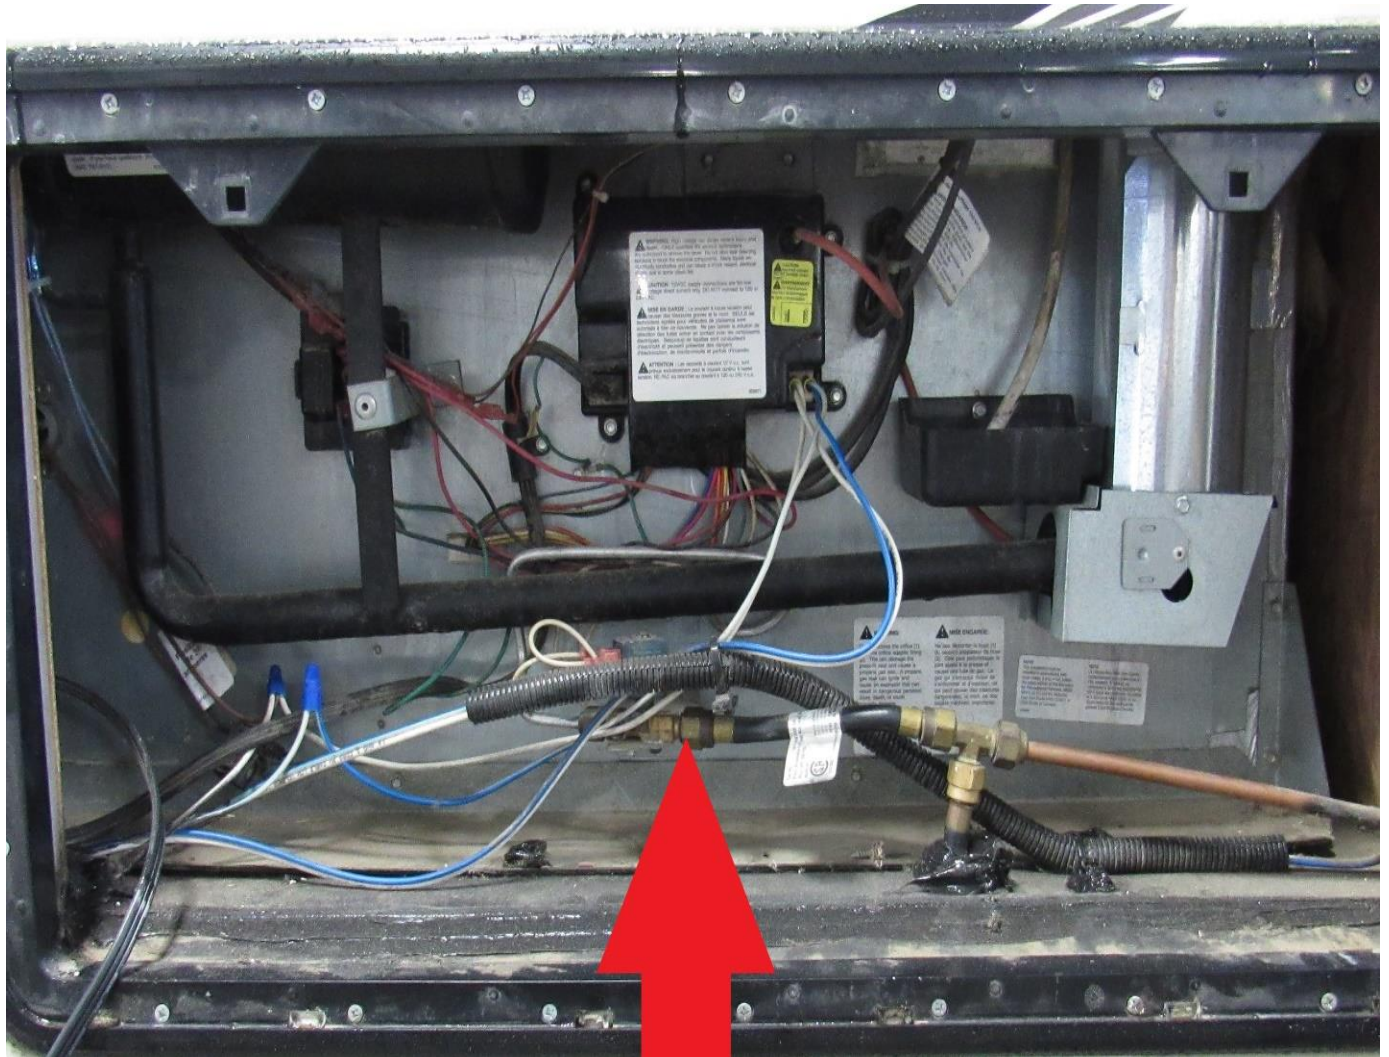

There are many different styles out there but most have at least 2 mounting screws through the back plate holding the fridge to your RV floor. Screw size and bit needed will vary from coach to coach. Remove these screws or bolts (RA).




On Winnabago coaches you will have 4- 9/16" bolts lagged to a steel side plate, 2 on each side of the fridge, also the top roof vent cap needs to be removed and 2 to 4 philips screws need to be loosened from the top of the fridge.



Going inside, remove all food items and start by removing the 4 black button covers on the top and bottom. (RA) Remove the 4 mounting screws on top and bottom (RA). Older style fridge trim might not have the external screw buttons but screws will still be underneath the trim after trim is removed. Screw size and bit needed will vary from coach to coach.




Take a 5/16" hex bit and cordless impact driver and proceed to remove all the screws (RA) in the freezer and the refrigerator.

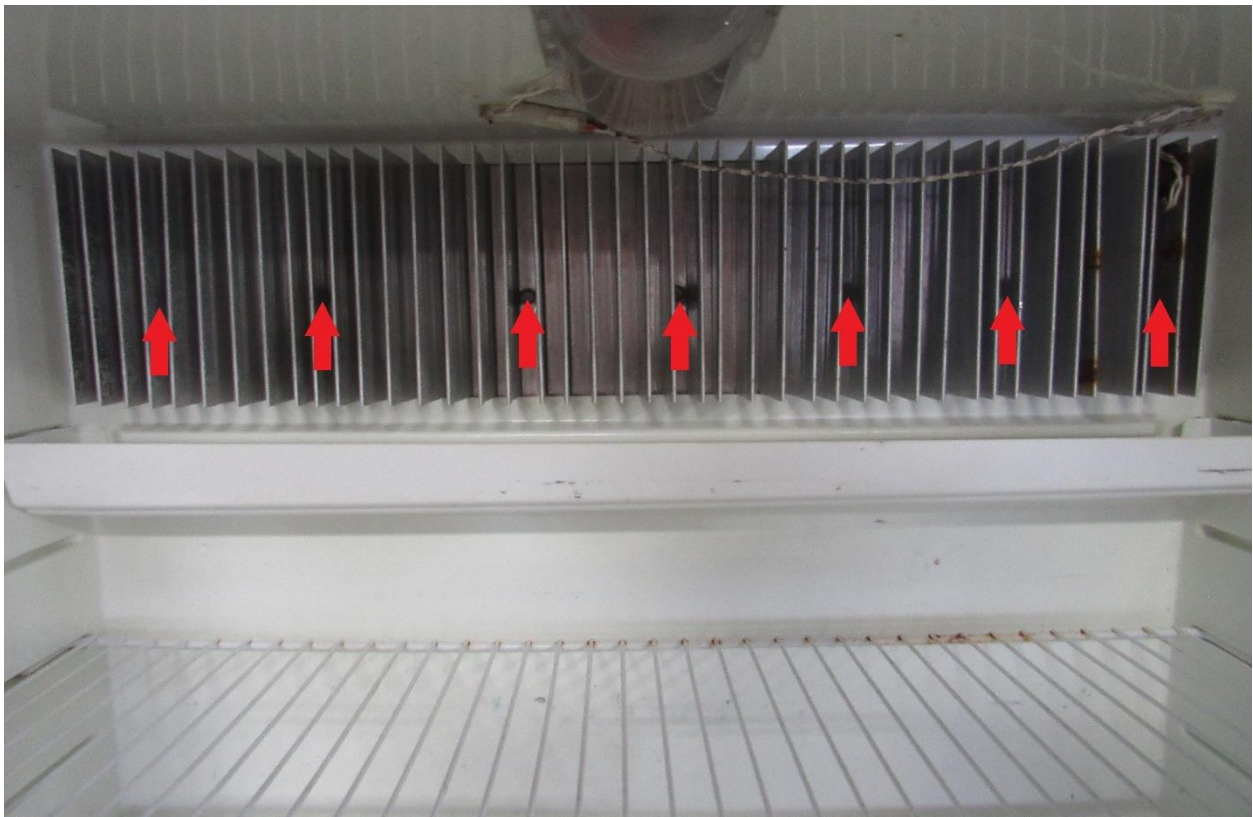


We do not show the fridge being slid out onto the floor, as the lay out of the coaches vary greatly and so it could be misleading to your scenario. But the object is to have 1 guy on each side of the fridge and as your fridge starts to exit lift up gently so when the rear end of the fridge fully exits the cavity that it does not drop, but needs to be gently and carefully set on the floor and pushed or carried to your open floor area. Lay fridge face down on the floor, making sure doors are latched shut so they don't swing open and we normally put a pile of blankets on the floor by the top freezer door so the fridge is lying face down at an angle.


Start by taking the LP solenoid wires loose (save these for later) (**RA**) and 12v fan wires (**YA**) loose from the board.

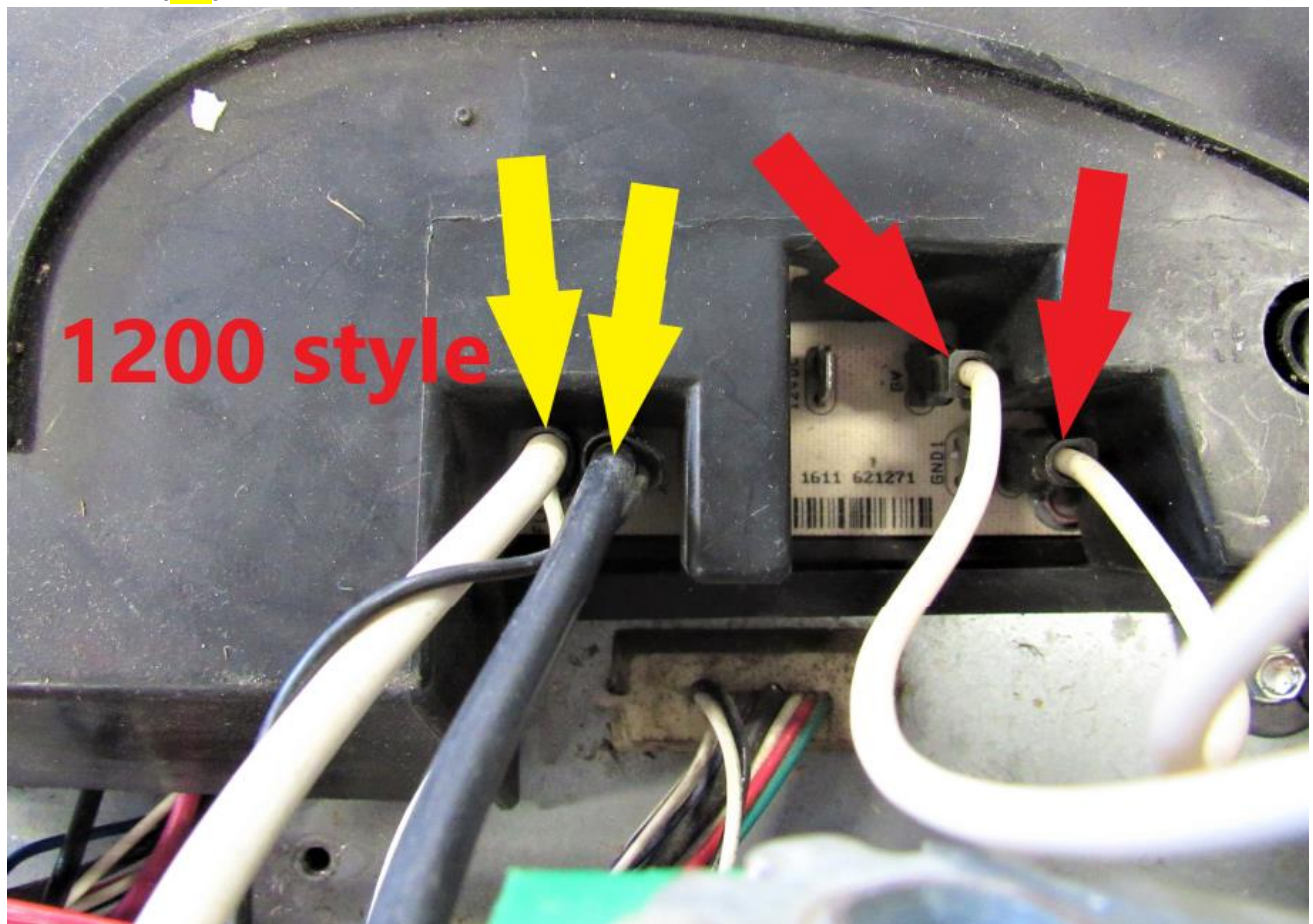


Take the igniter (RA) and the 120v plug (YA) loose from the board.

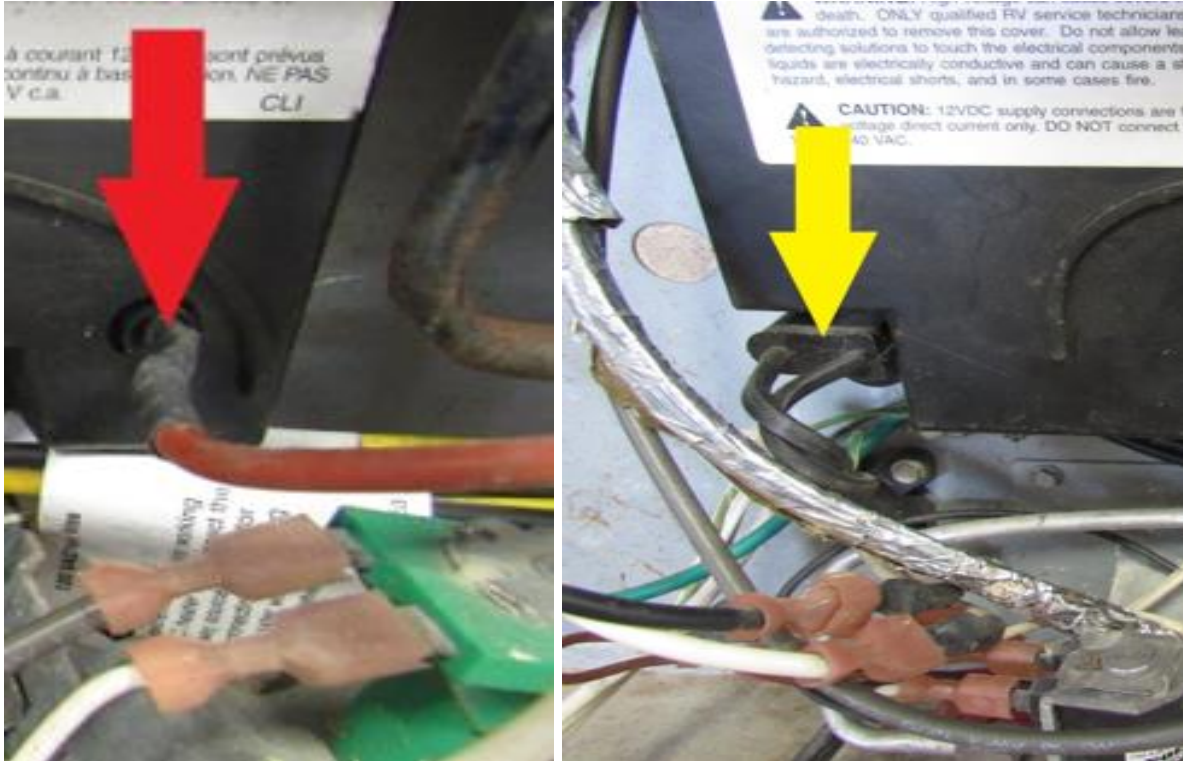


Remove ¼" Hex mounting screws on board (RA). Remove ¼" ground screw (RA).

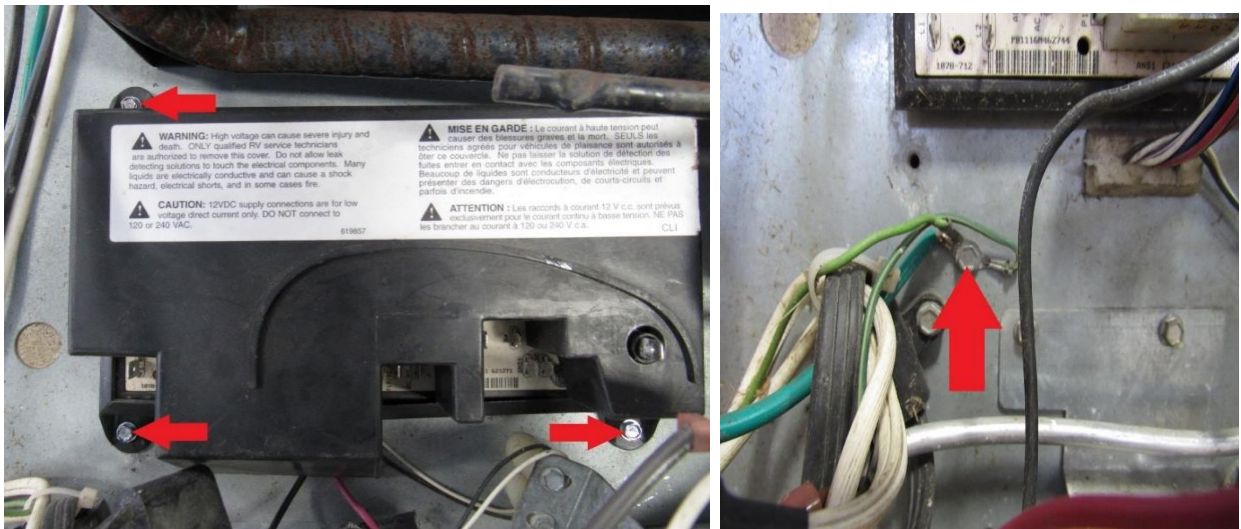


Remove ¼" mounting screws on LP bracket (**RA**).

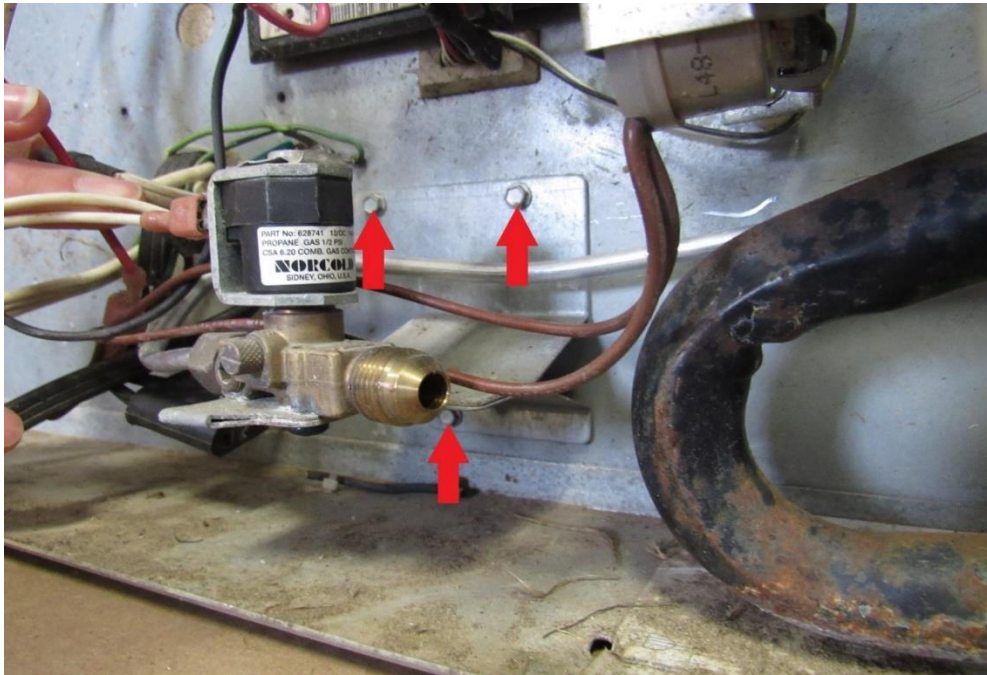


Remove the red wire from the safety recall kit (**RA**) this recall kit can be reattached to the new cooling unit or left off, we leave this up to you, it's a kit Norcold designed for their unit and will still work on our new unit but we do not require it or show how to install it as these can vary from one to the next. If you do want a safety device, you have 3 options, #1 the original device shown here #2 a Halon Fire extinguisher w/h a solder fuse #3 ARP fridge defend. We do not sell any of these 3 but just a suggestion and whatever you use has to be installed and worked with the manufacture of the product.

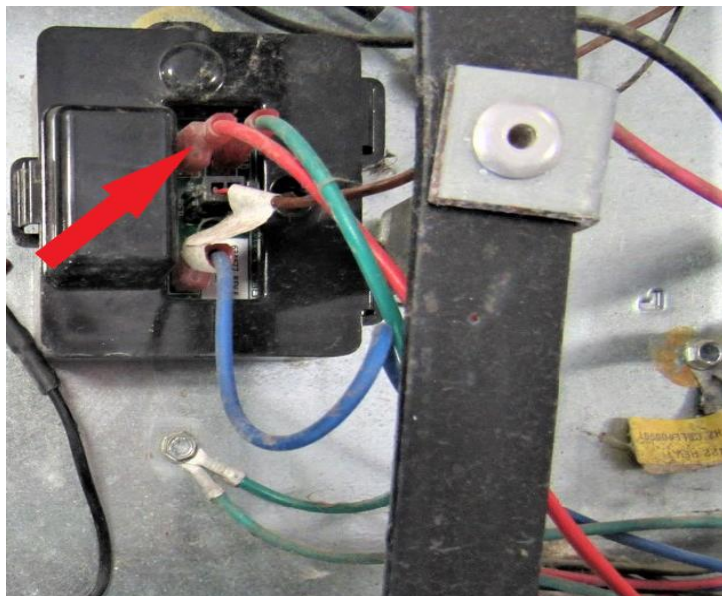


Remove ¼" defrost cup screw (RA) and set cup to the side.

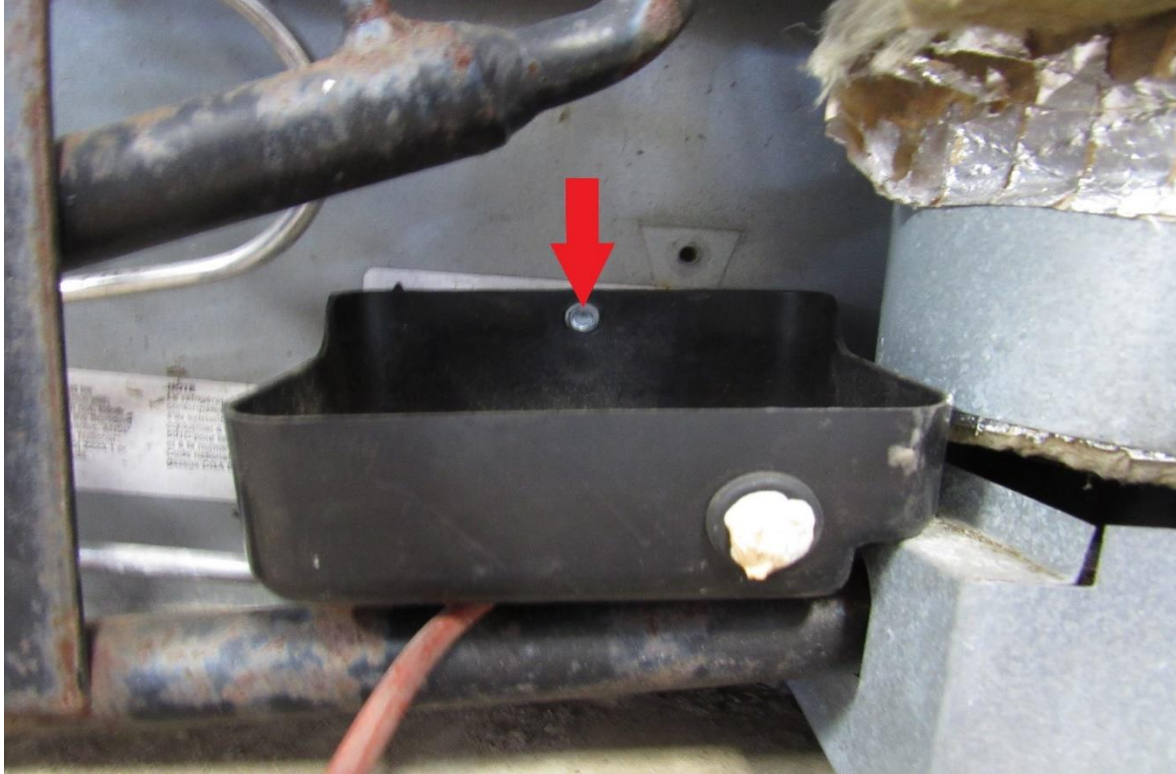


Remove the heating element wires from board (RA).

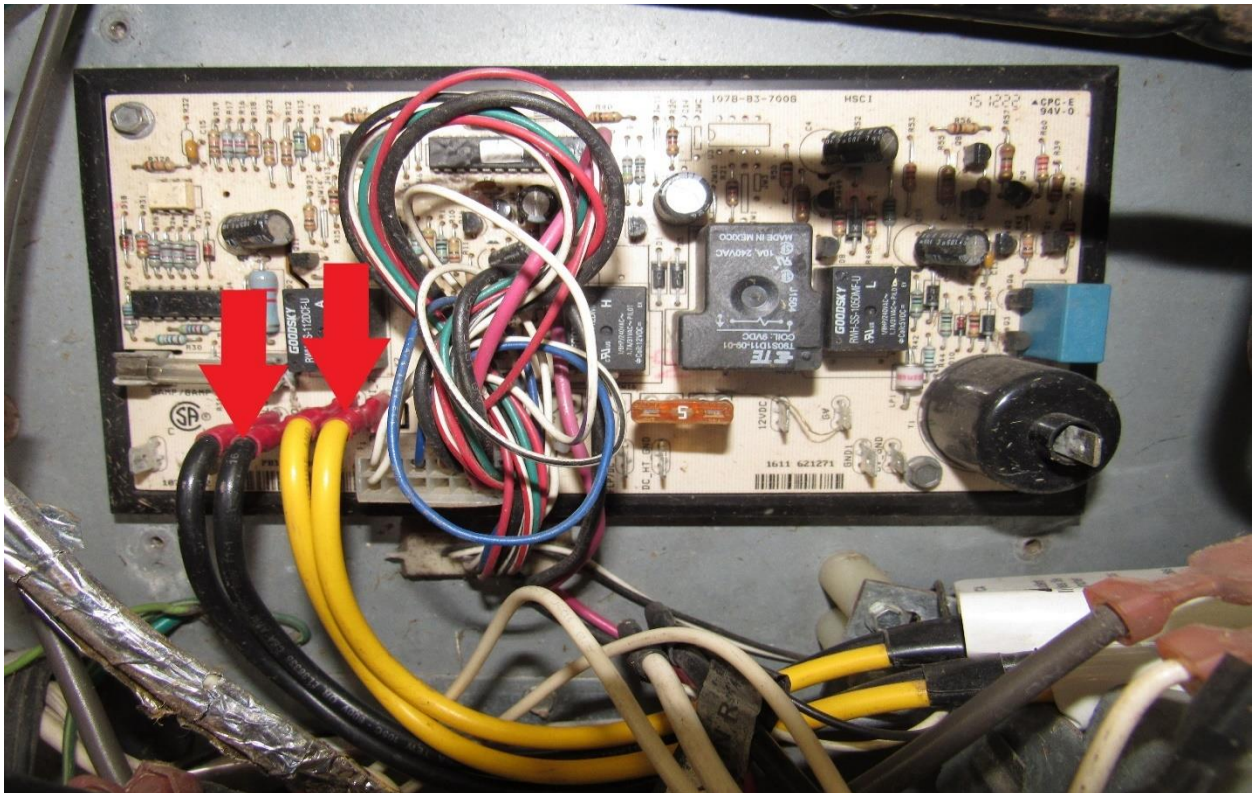


Remove the ice maker solenoid brown and white wires (**RA**).

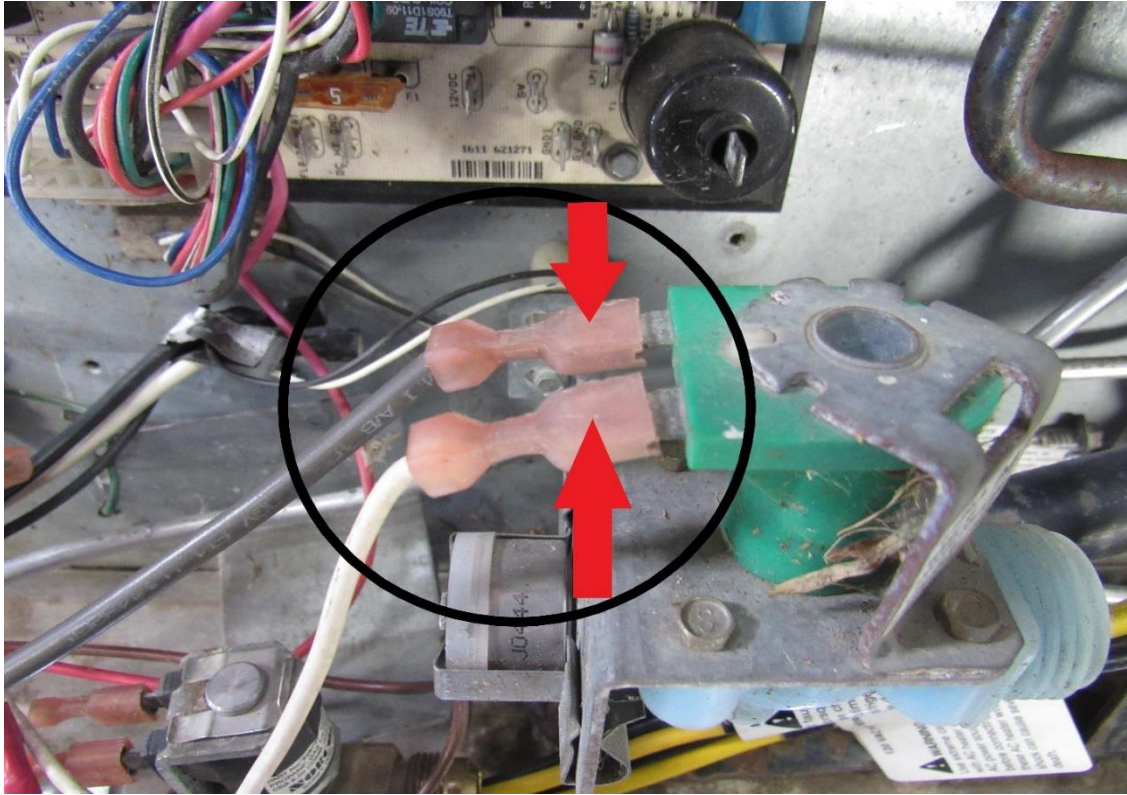



Disconnect the ice maker heater wires (**RA**) and water supply line (**YA**).

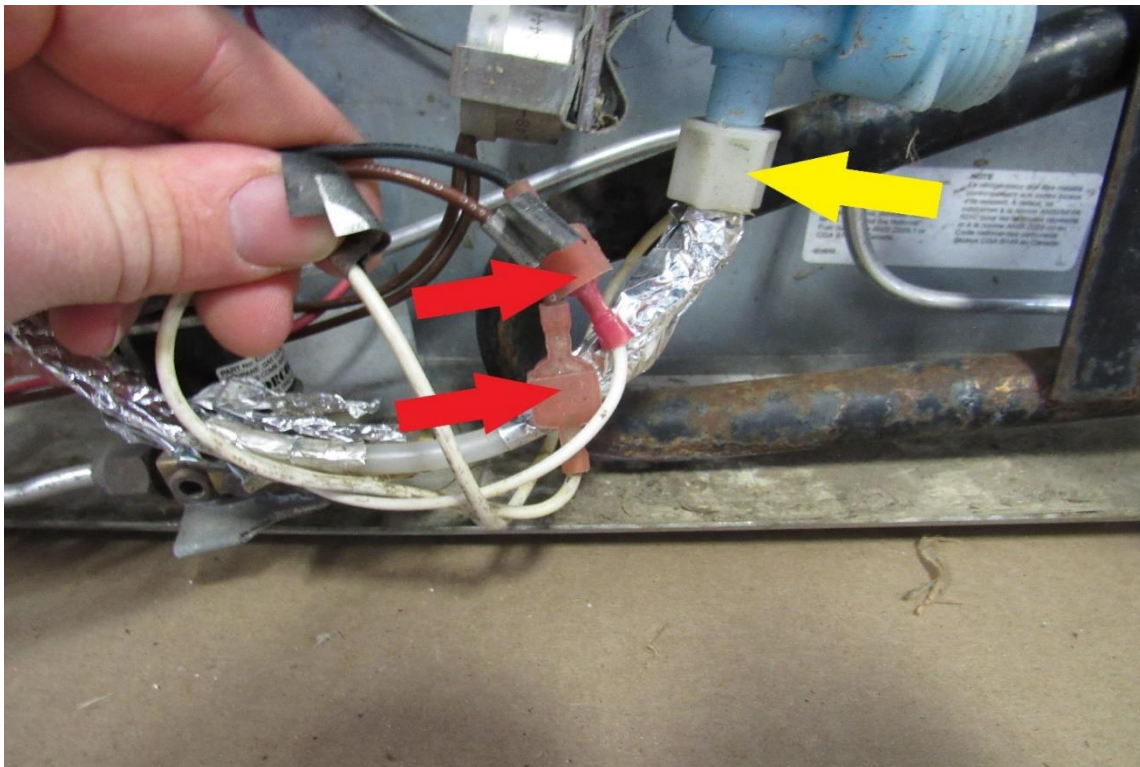

Disconnect the 120V ice maker wires, mark these to make sure you know which ones they are later, because these can be confused with the 12V fan wires (**RA**).

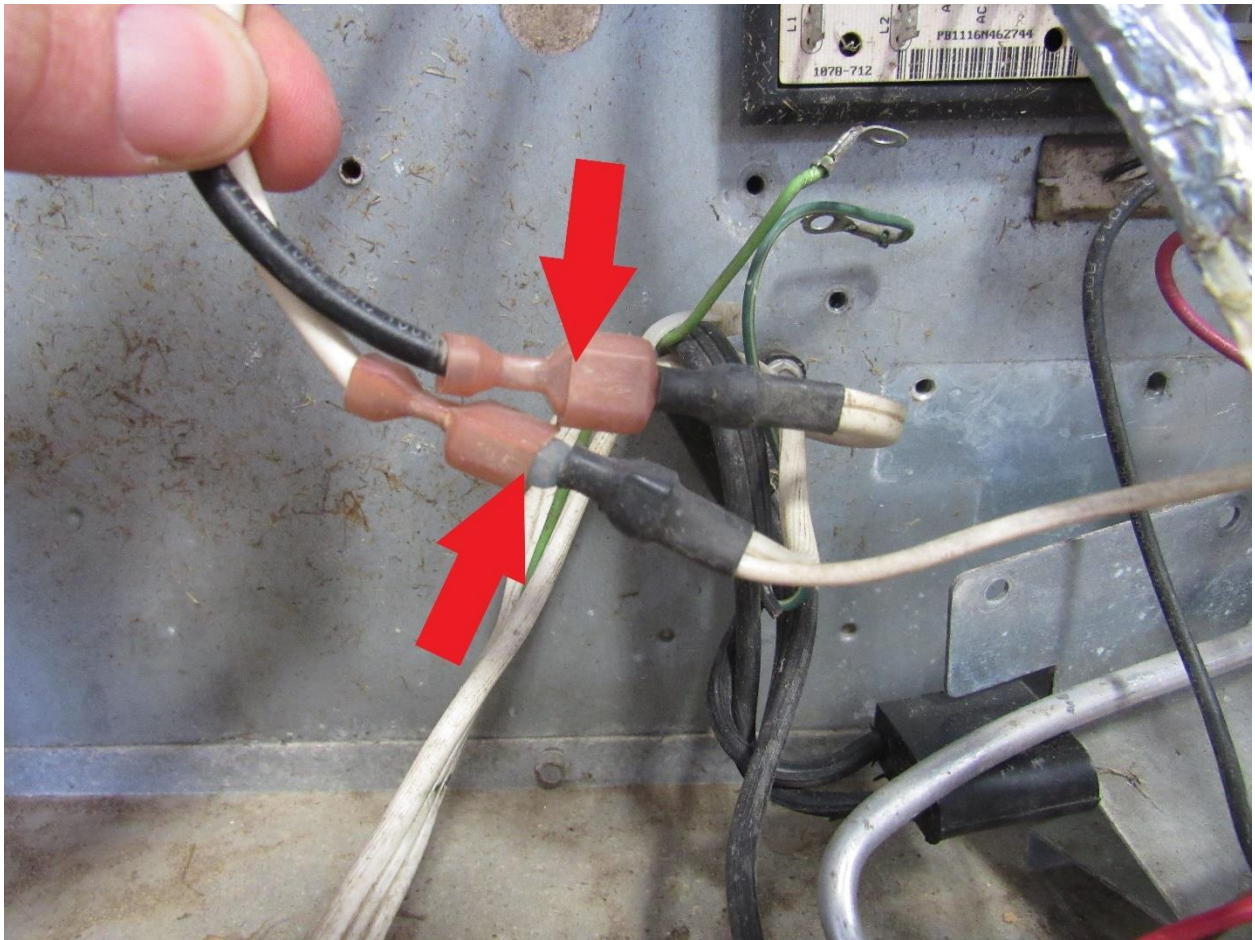

Remove the 5/16" mounting screws (RA) on the top and bottom of the unit.

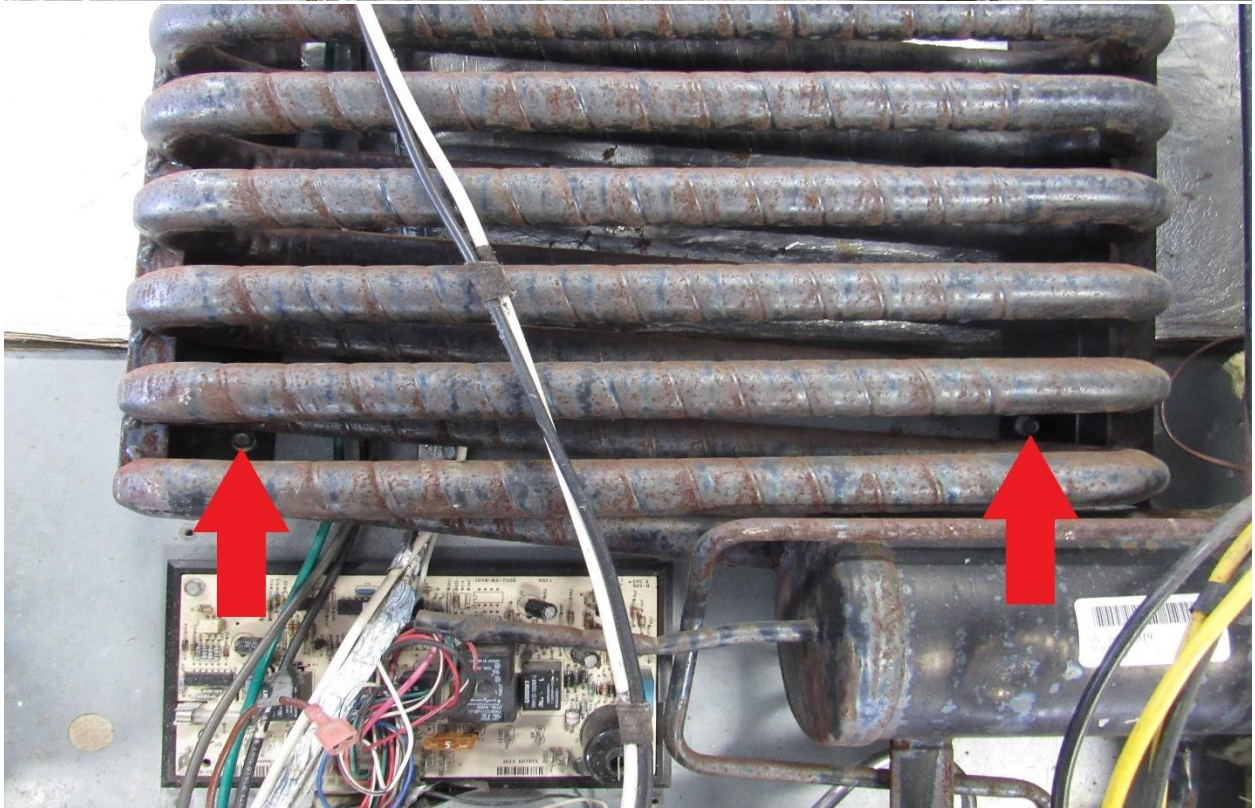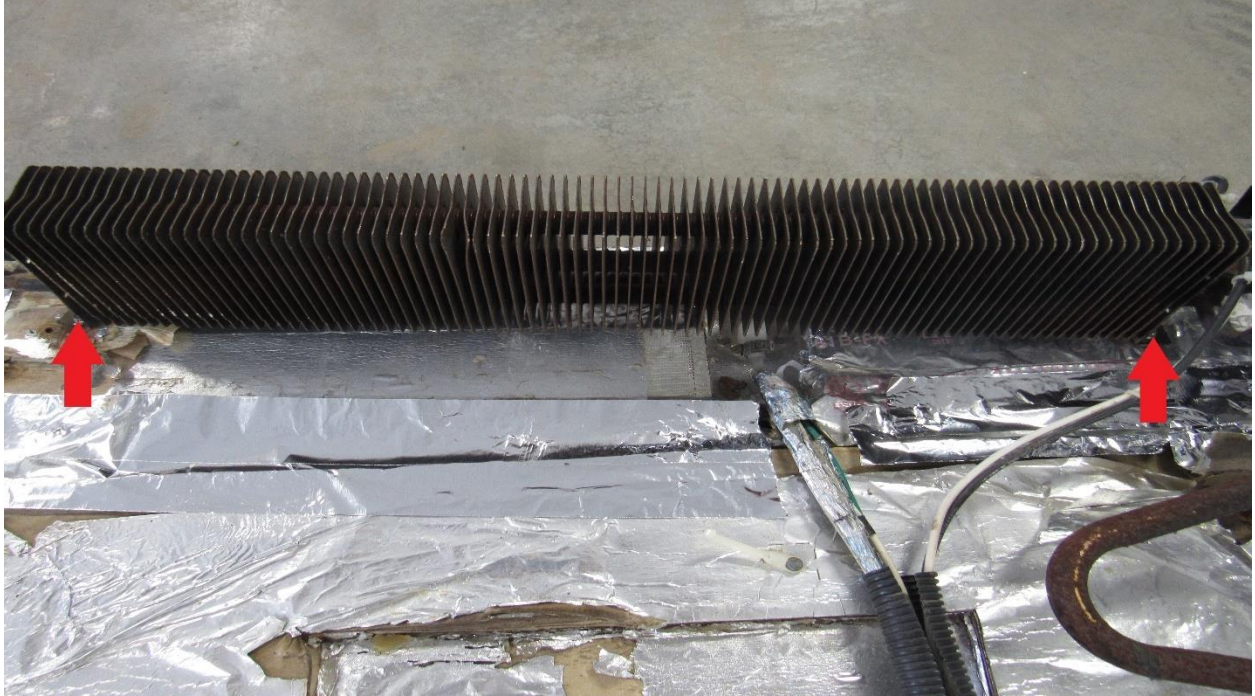


Remove the black wire loom (**RA**) and cut all zip ties holding the bundle of wires together.




Using a Phillips bit, remove the 2 screws holding the fan temperature switch. We will use those screws again later on the new unit.




Remove the 4 fan bracket screws (RA).

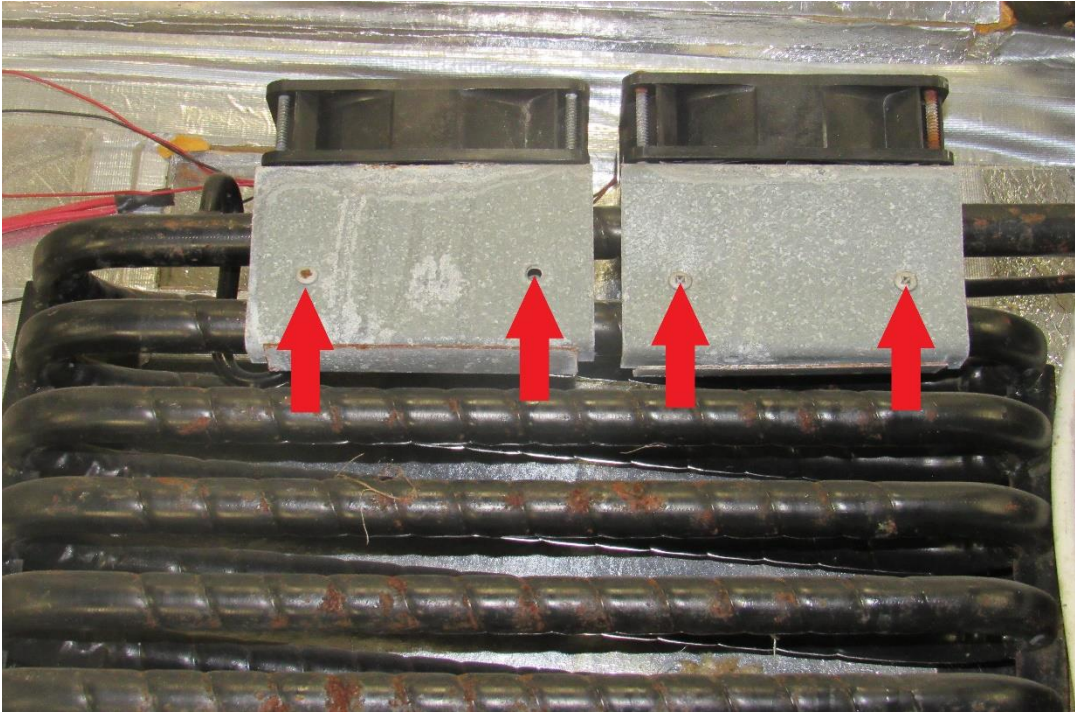

Throw away the clamp bracket (YA).

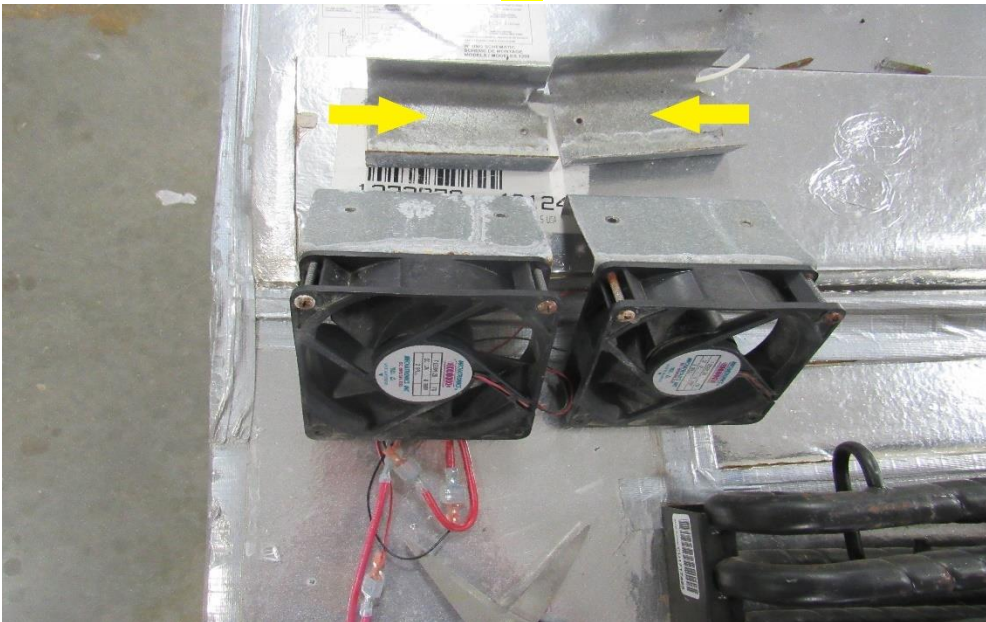


If you are replacing your ventilation fans, which we recommend, now is the time to do so. Start by removing the 4 screws (RA). Assemble the new fans in the same orientation as the old fans. Set the fans aside for now.

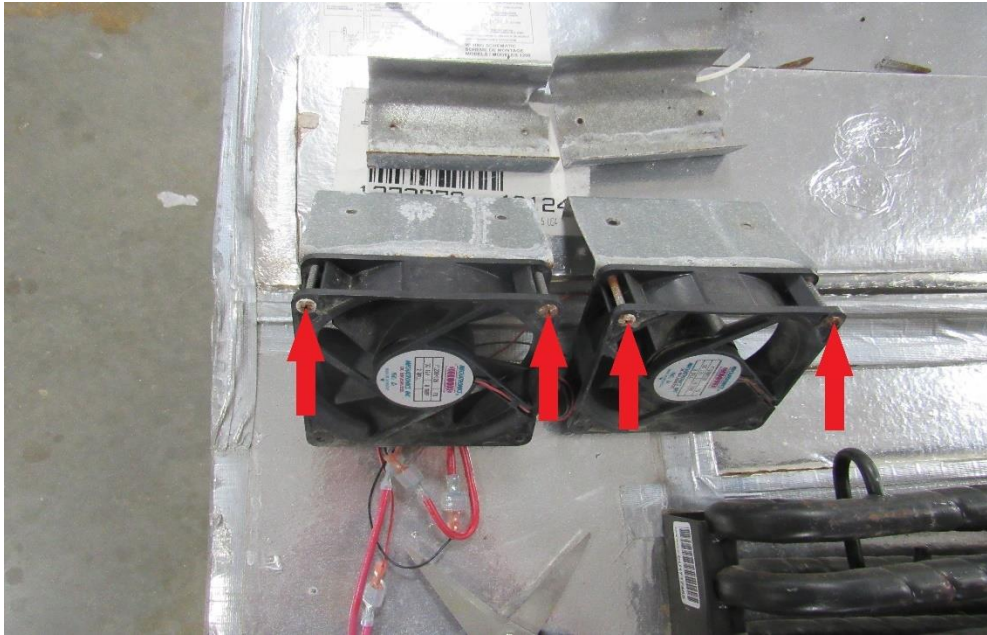

Pull icemaker wires and water line up and to the side as shown (RA). Be careful with the water line as it gets brittle with age. If you are removing the ice maker, these can be cut and completely eliminated.




Leave fan wires with the temperature switch and the black and white (Red and Black on some models) cords hanging over side as shown (RA).

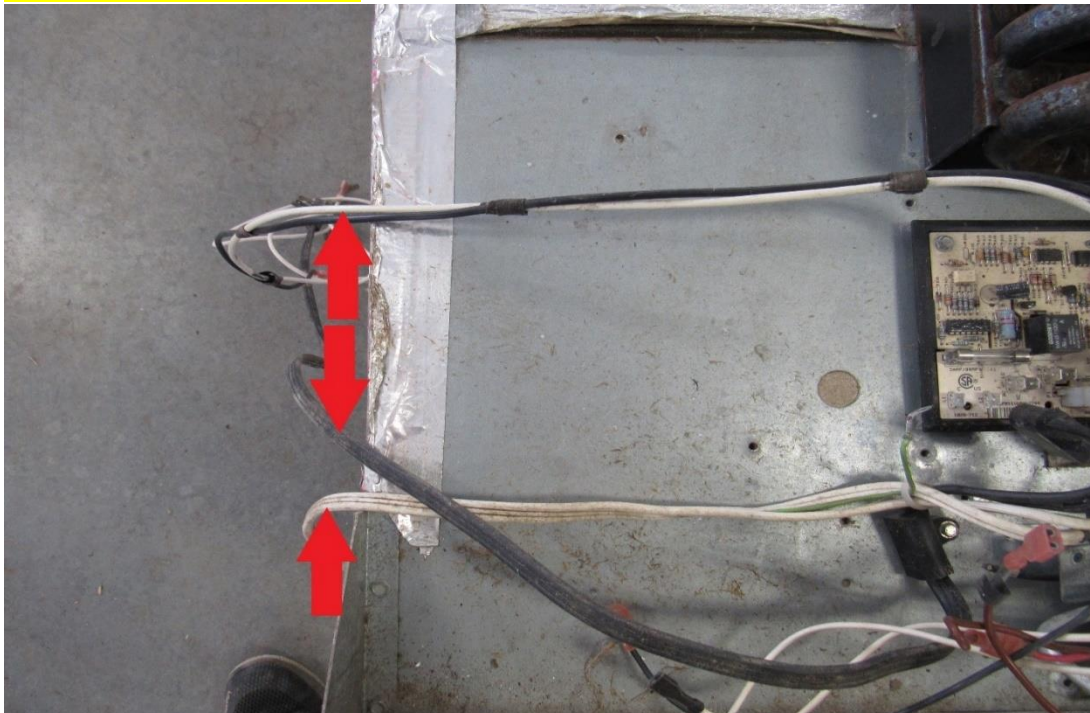


If old unit is taped along the sides, cut tape with knife (**RA**).



Take off the old cooling unit of your refrigerator by lifting straight up and out. We will need to take some parts off of the old unit later. Clean off any residual foam or thermal sealant around the edges (**RA**).

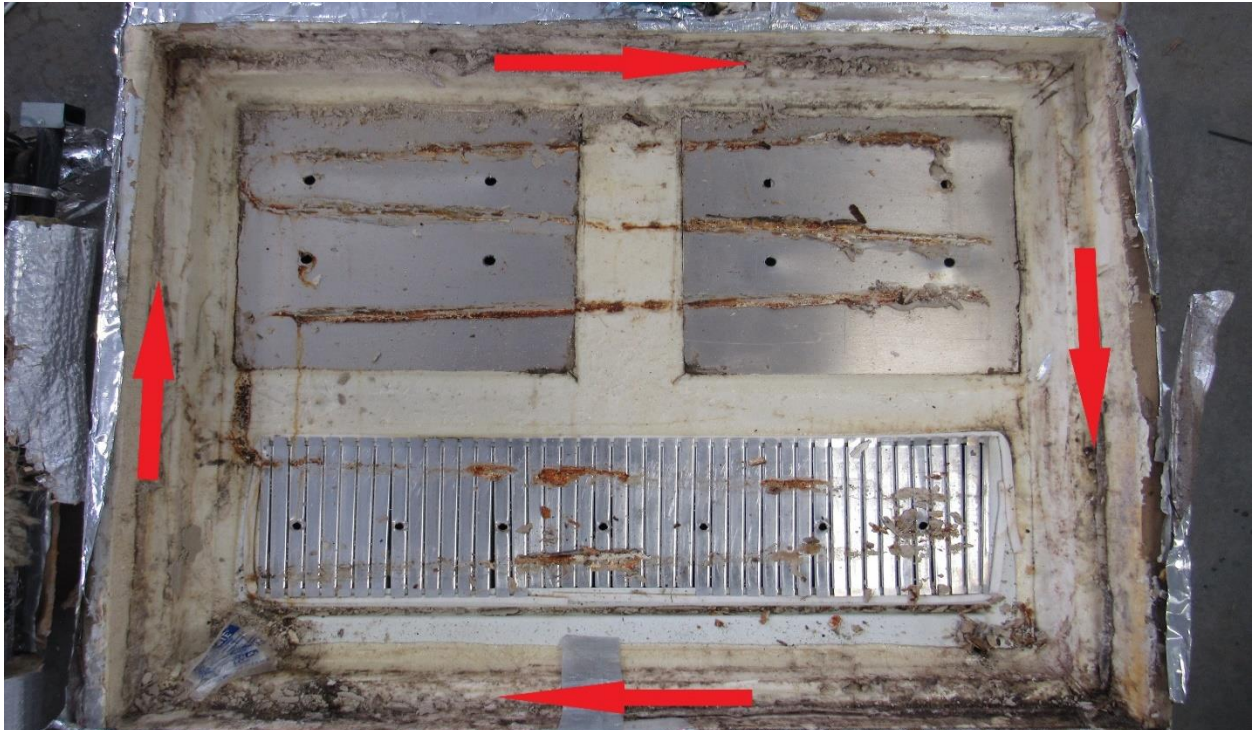


Clean off the old thermal mastic (**RA**) from the freezer plates and refrigerator fin. A large blade putty knife or scraper works well. A shop vac works well to remove any other debris or loose foam.

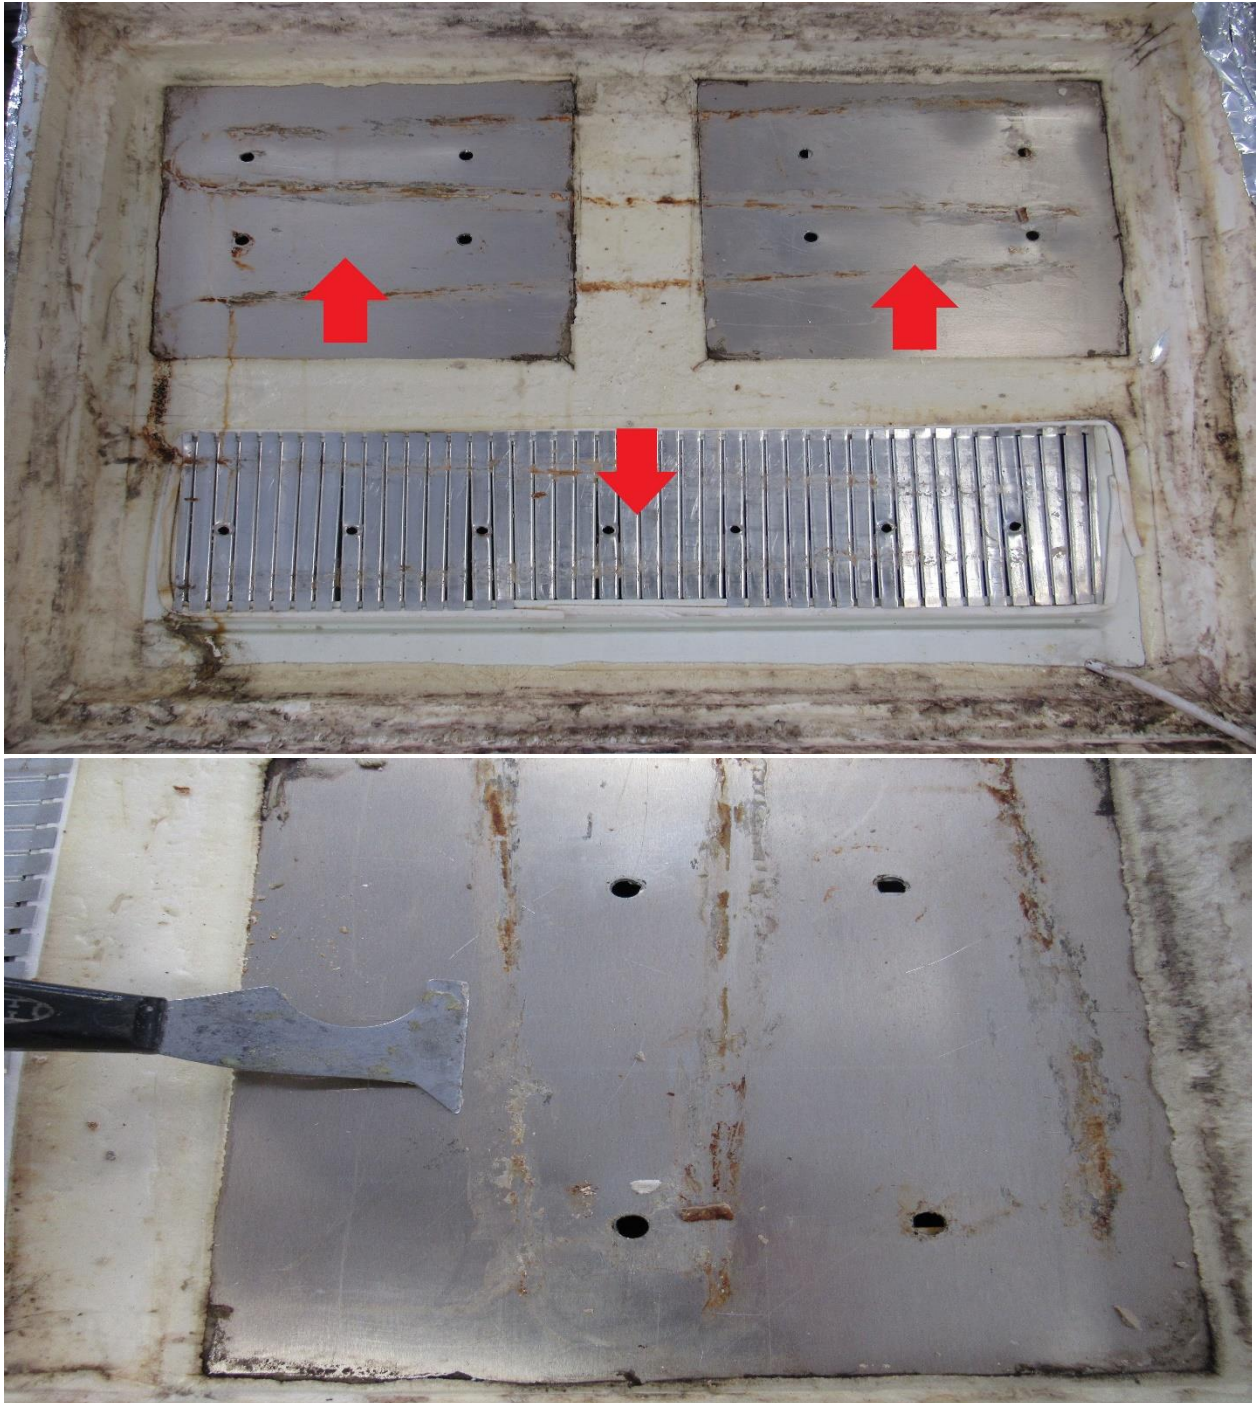

This is how your board and wiring should look like before continuing the install. As mentioned before, if the ice maker is being removed, all ice maker wiring, water valve, and 120V ice maker cord can be removed and discarded.



If you are installing a fin fan, take the fin fan out of the plastic bag. It will include two scotch locks that we will use to hookup later.

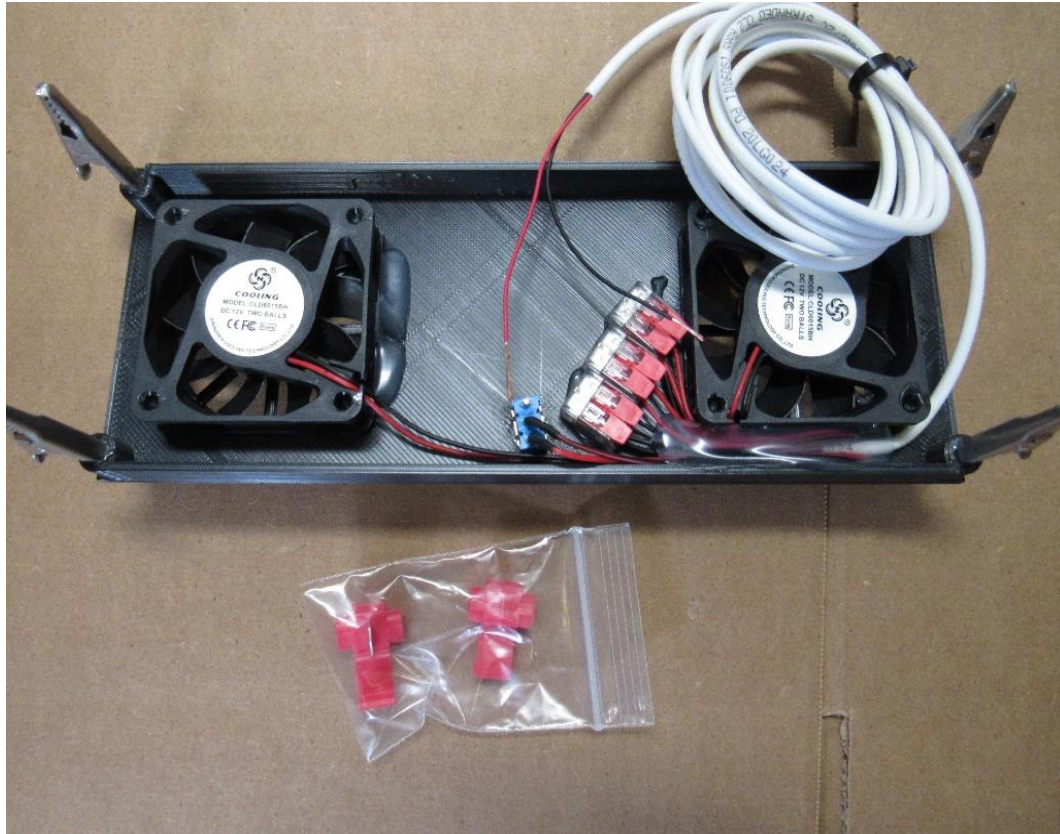

Installing the fin fan has 2 options:


Option#1 Set the fin fan into the refrigerator fin opening, make sure it's somewhat secured to a shelf for now. Leave enough wire as shown inside and also enough on the bottom to hook up with later. The fin fan wire will remain in this position throughout the rest of the install.




Option #2 If you would rather install the fin fan wire thru the defrost hose later, please see our fin fan installation manual at <https://jc-refrigeration.com/wp-content/uploads/2021/04/fin-fan-installation-website.pdf?3f35fa&3f35fa>



Now we go back to the old unit to take off the LP burner and igniter. Start by removing the ¼" screw (RA). The igniter is attached to this bracket. Leave it attached and just slide the bracket to the side for the next step.

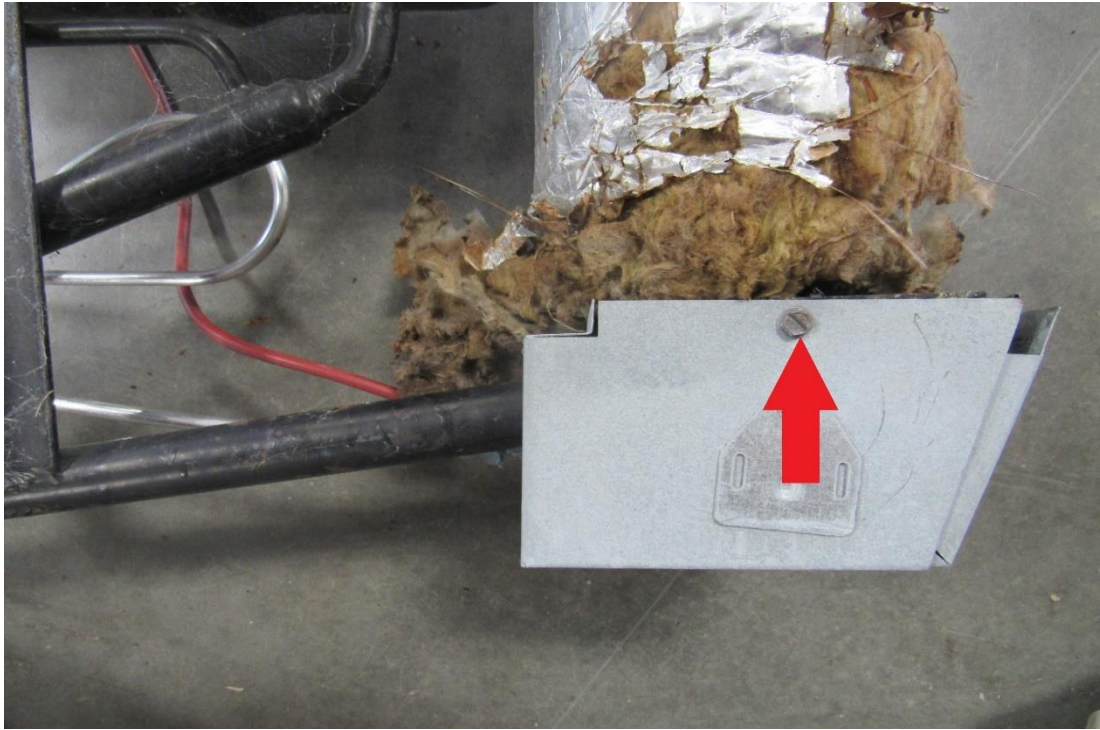


Remove the ¼" screws (RA) and set the burner housing to the side.

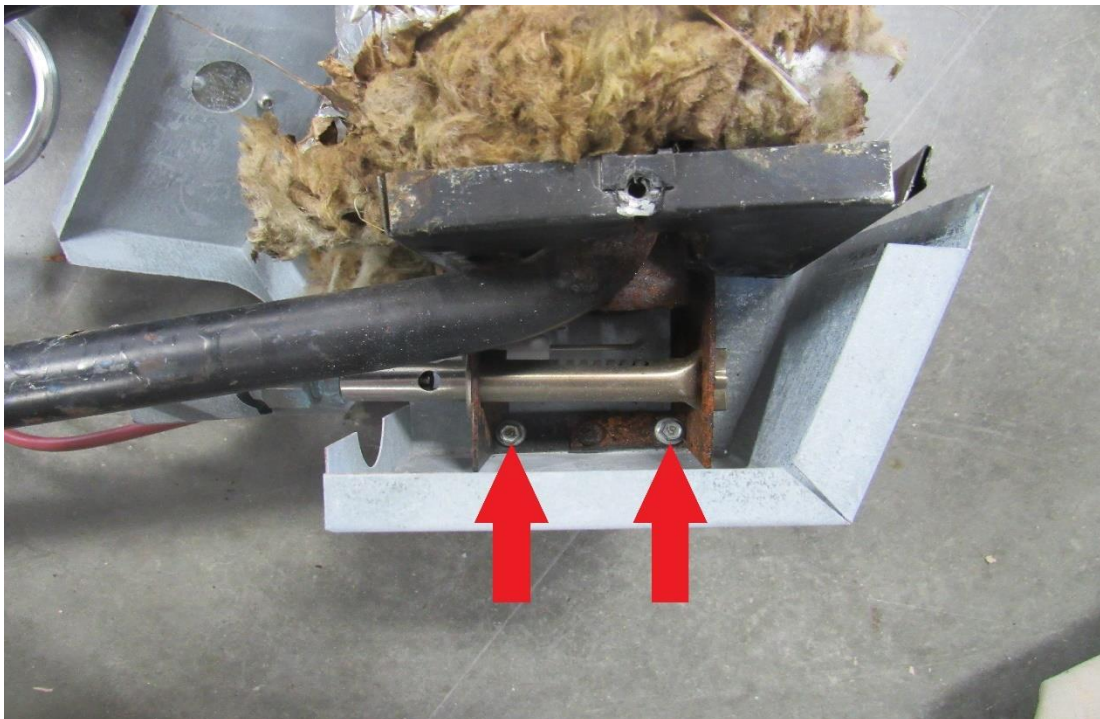

Remove the igniter and burner screws (RA). These are usually Phillips screws.



These are the parts to take off of the old unit, and install onto the new unit.

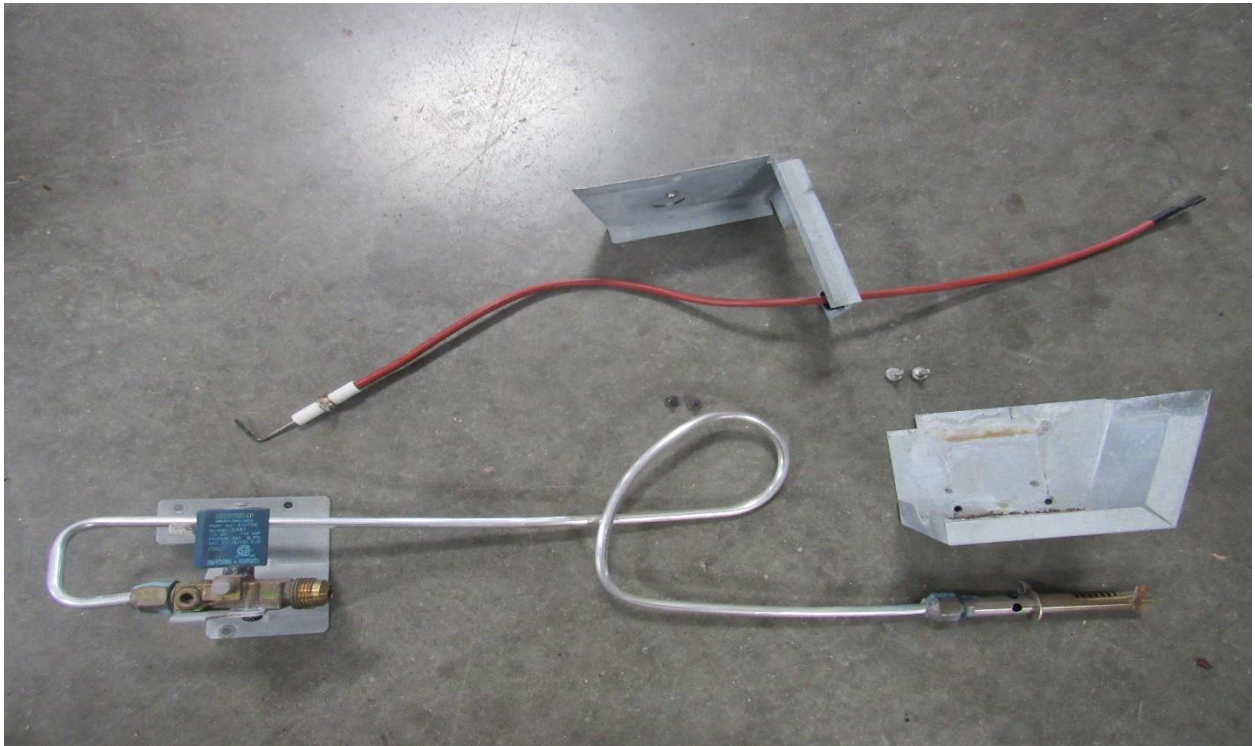


If you are replacing the LP Burner




You start by taking 2 crescent wrenches and loosening the flare nut by the brass orifice, you will notice the orifice is backed away from the burner tube (above), this adjustment is done here and should stay that way, otherwise the burner will not work correctly. Do not over tighten the burner to the gas line as this might create a flare crack, yet you do want it tight enough so you do not have a gas leak.




On the new unit, install the burner assembly first (RA) using the original screw.
Followed by the igniter (YA) also using the original screw.

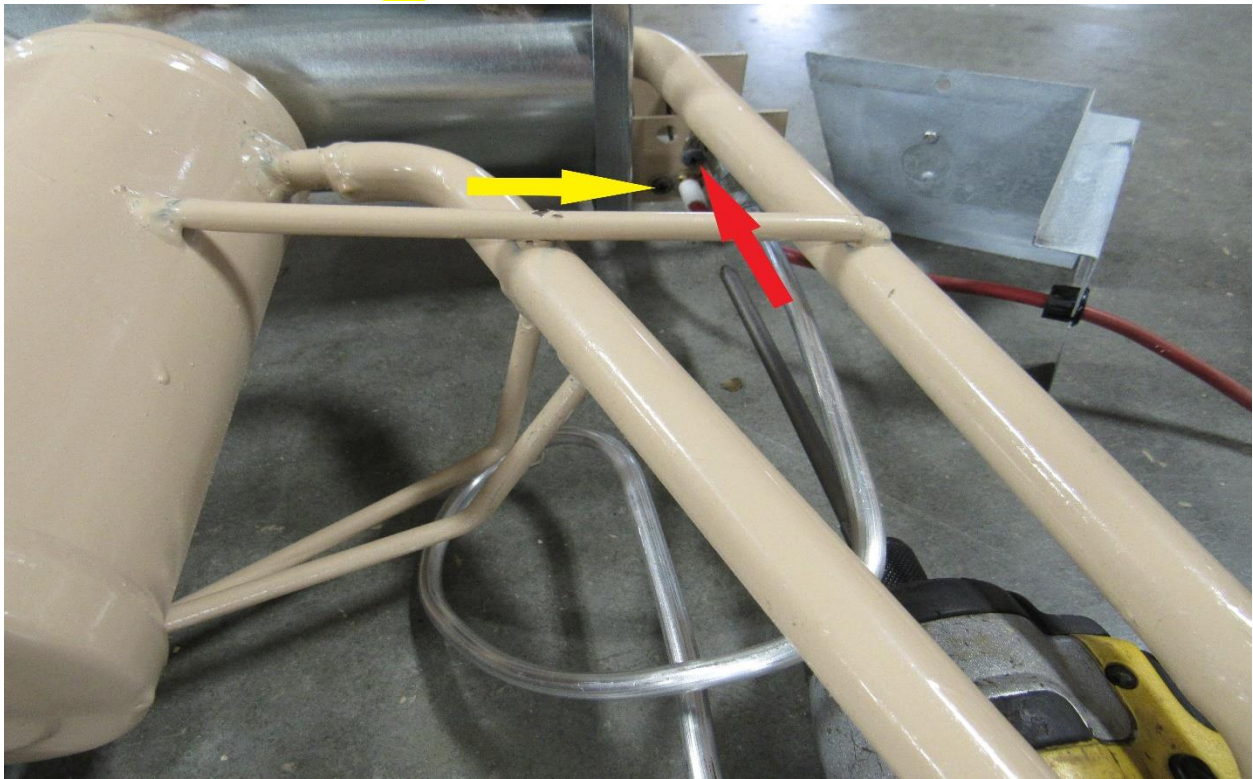


Using the original ¼" screws. Install the burner housing as shown (RA).

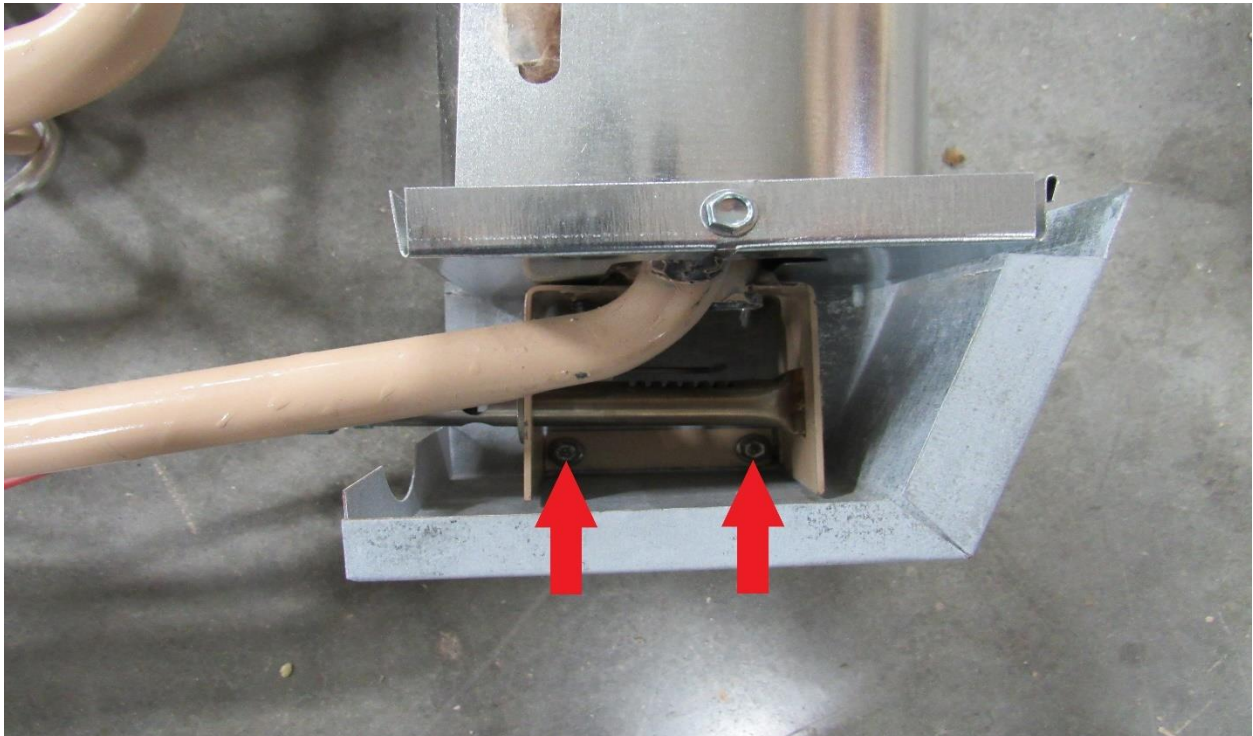


Remove the top screw from the new unit as shown (RA). We will use this screw to mount the top piece in the next step.

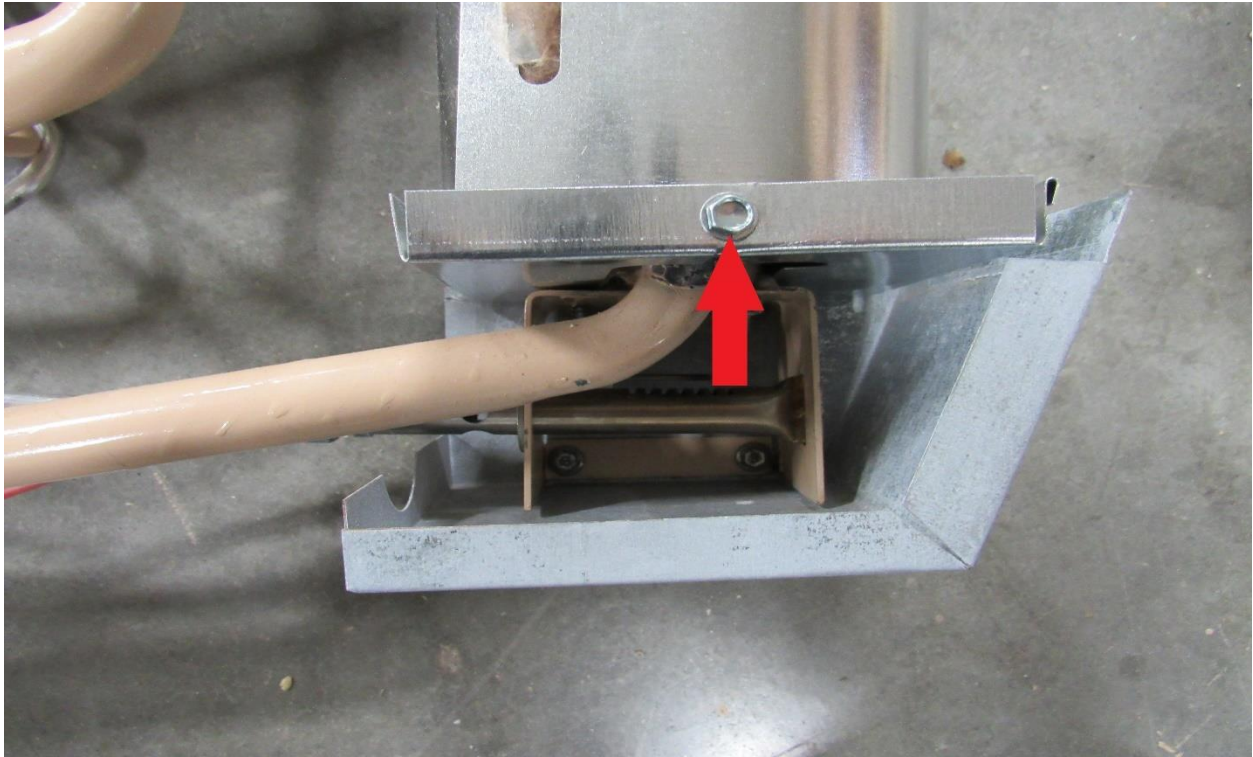


Install the ¼" screw as shown below (RA).

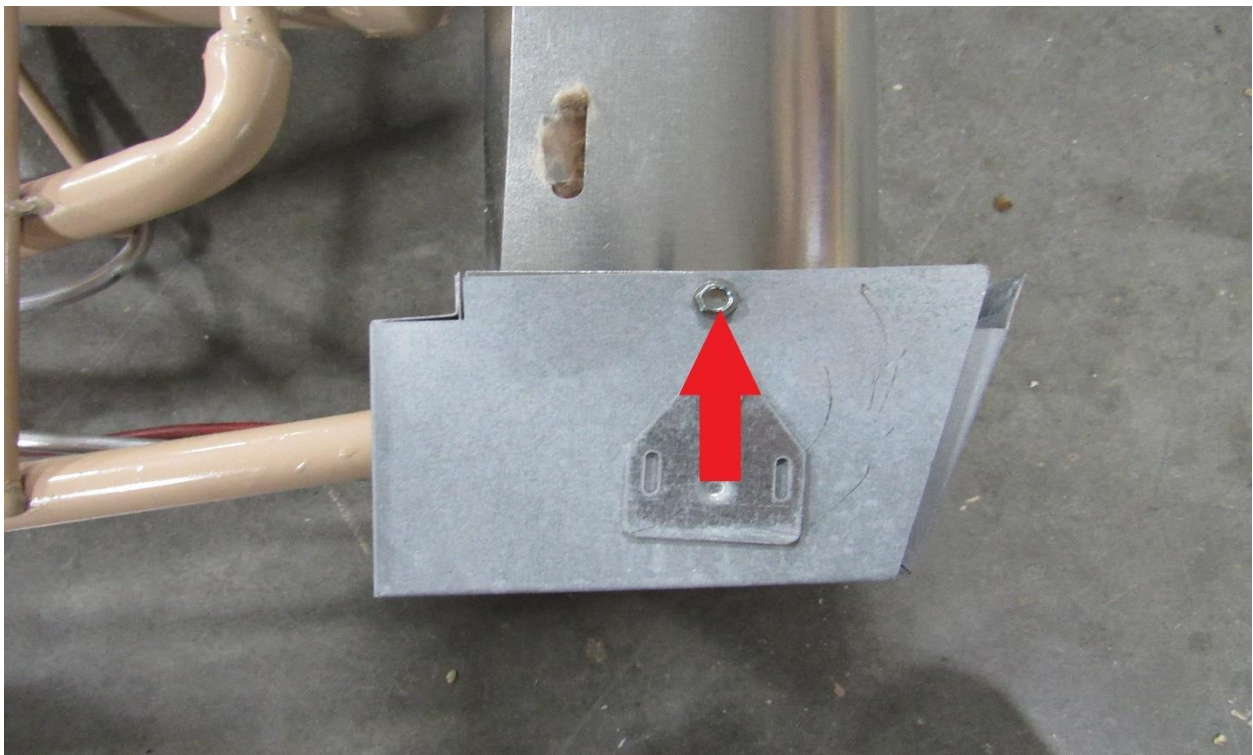

You will want the heater for the 1200 & 1201 style, if you have the heater for the 1210 & 1211 style then you have a 1210 unit in a 1200 box. If you bought new heaters with the unit this can be disregarded as the correct heaters will be with the new unit. The heaters should be snug but not really tight or floppy loose.

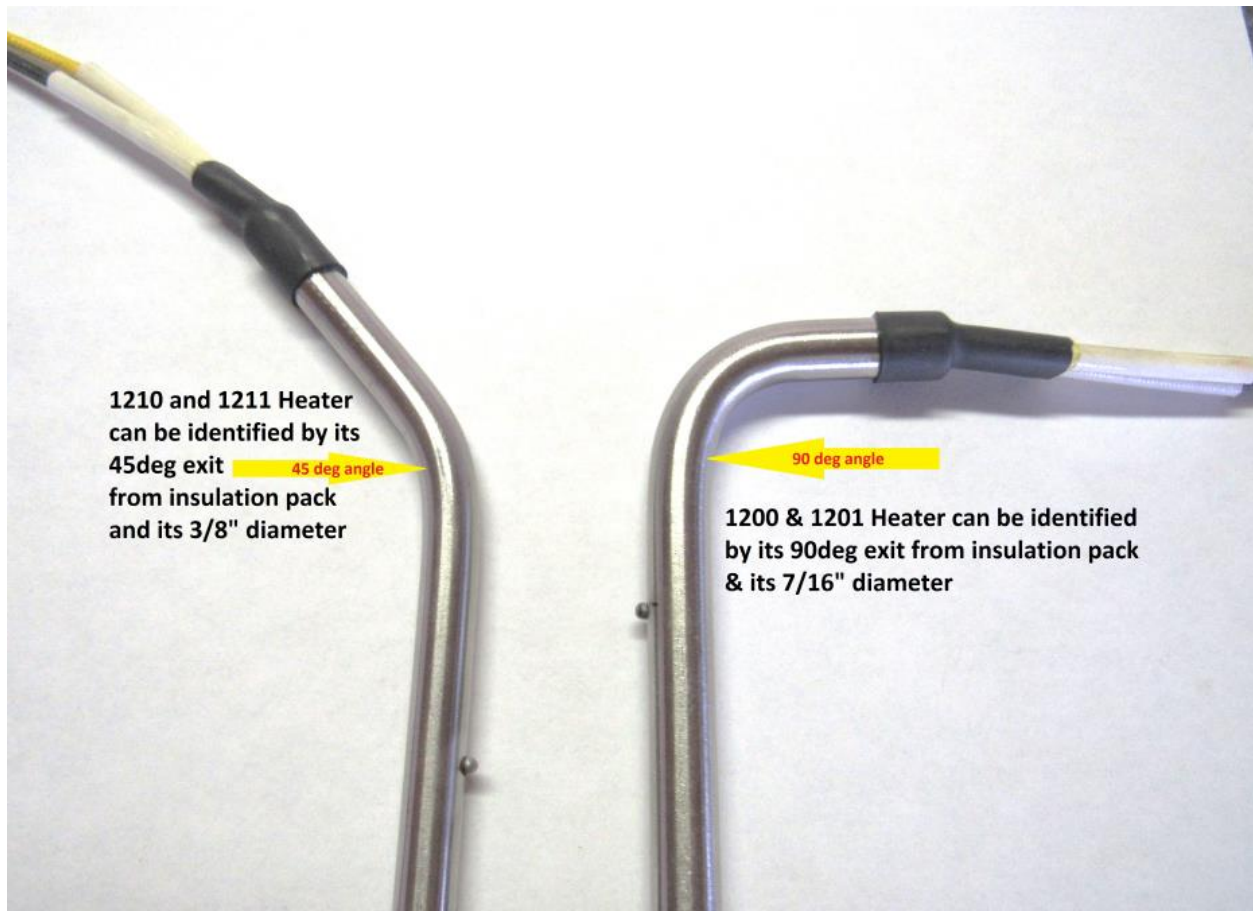


This is how your burner and igniter assembly should look after you're done. (RA)
Now unsnap and open the heating element flapper (YA)

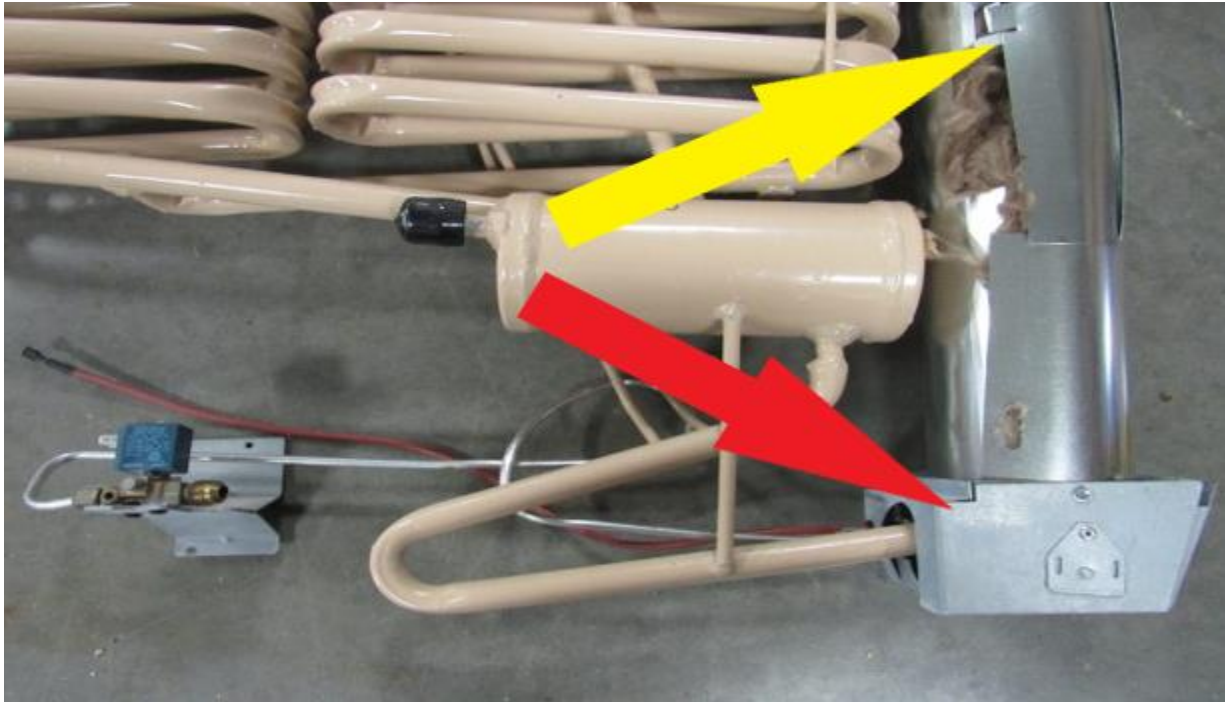


Push the insulation back so the heating element sockets are exposed, and slide the 2 heating elements into the sockets, make sure they are pushed all the way down to the stop point on the heater. Push insulation back over the heaters and close the flapper again and tuck the heater wires out of the way for now.



This is how your burner and igniter assembly should look after you're done.

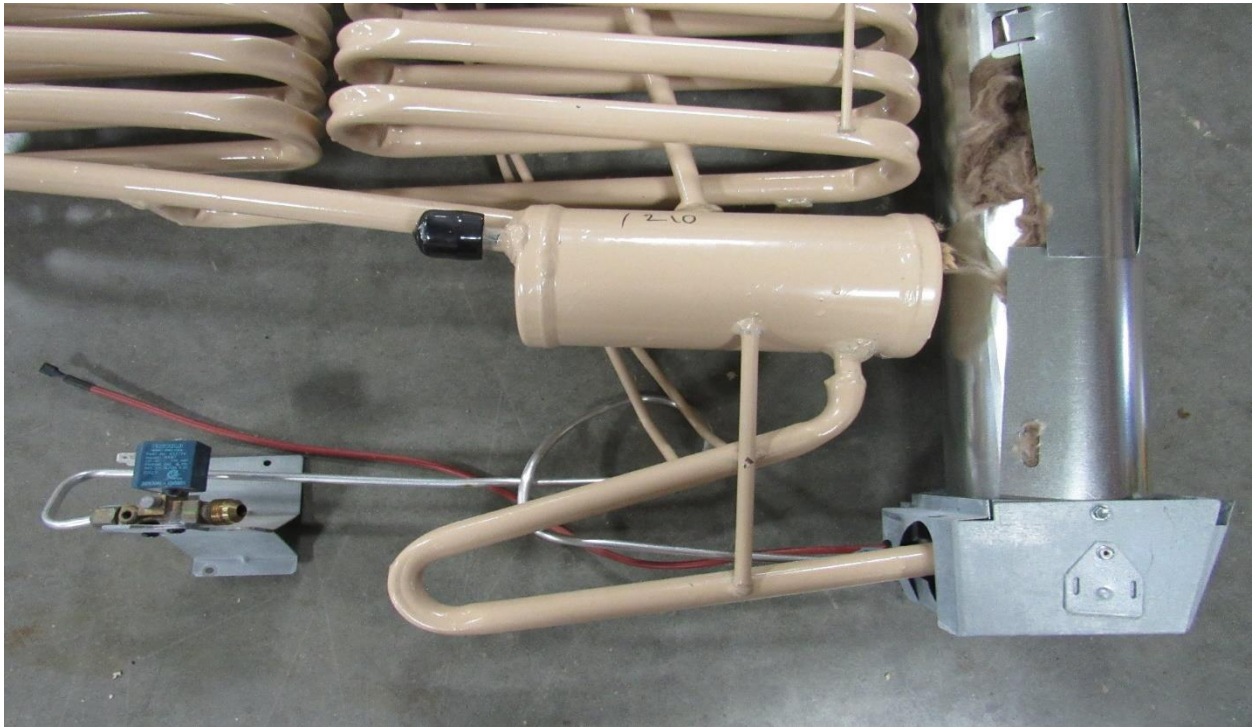

Lay the unit on its back for the next step.

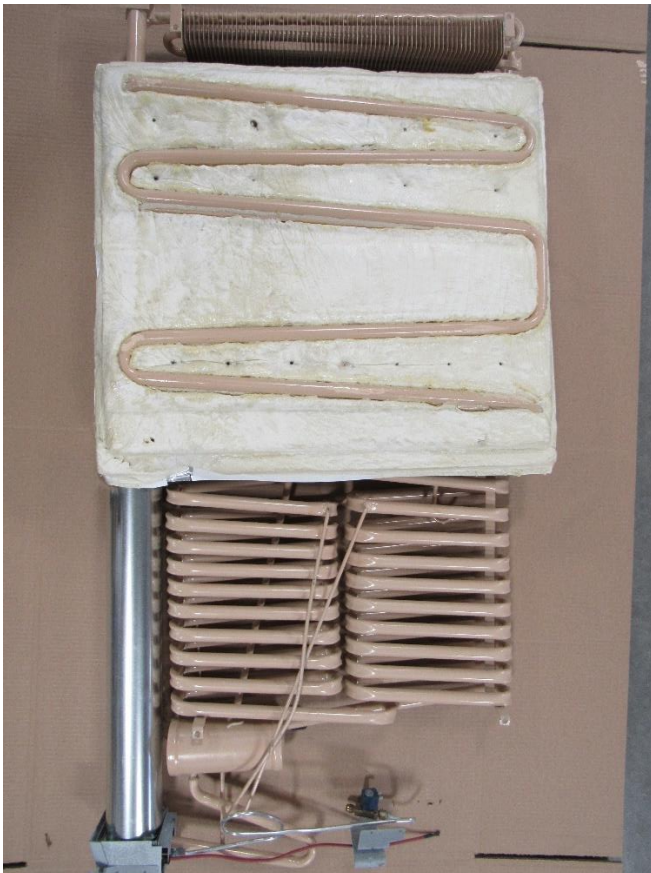

Lay unit into box being careful so as not to scrape off any thermal mastic on the box.


Insert defrost hose into the pre-drilled hole (**RA**) as shown, while lowering the unit into the box. Make sure to keep defrost hose snug so it does not kink while unit is being set down. Set unit all the way down into the box.





Warning: The next few steps are very important. If done incorrectly, the cooling unit freezer and fin screws might not line up the best. If possible, have someone to help you with the next steps as it will make everything much easier.

Install two 5/16" self-taping mounting screws. One on the bottom right-hand side and one on the bottom left-hand side as shown (RA). Do not be alarmed if the cooling unit does not sit tight with the box at first. After you fasten the mounting screws, the unit will be sucked in tight.

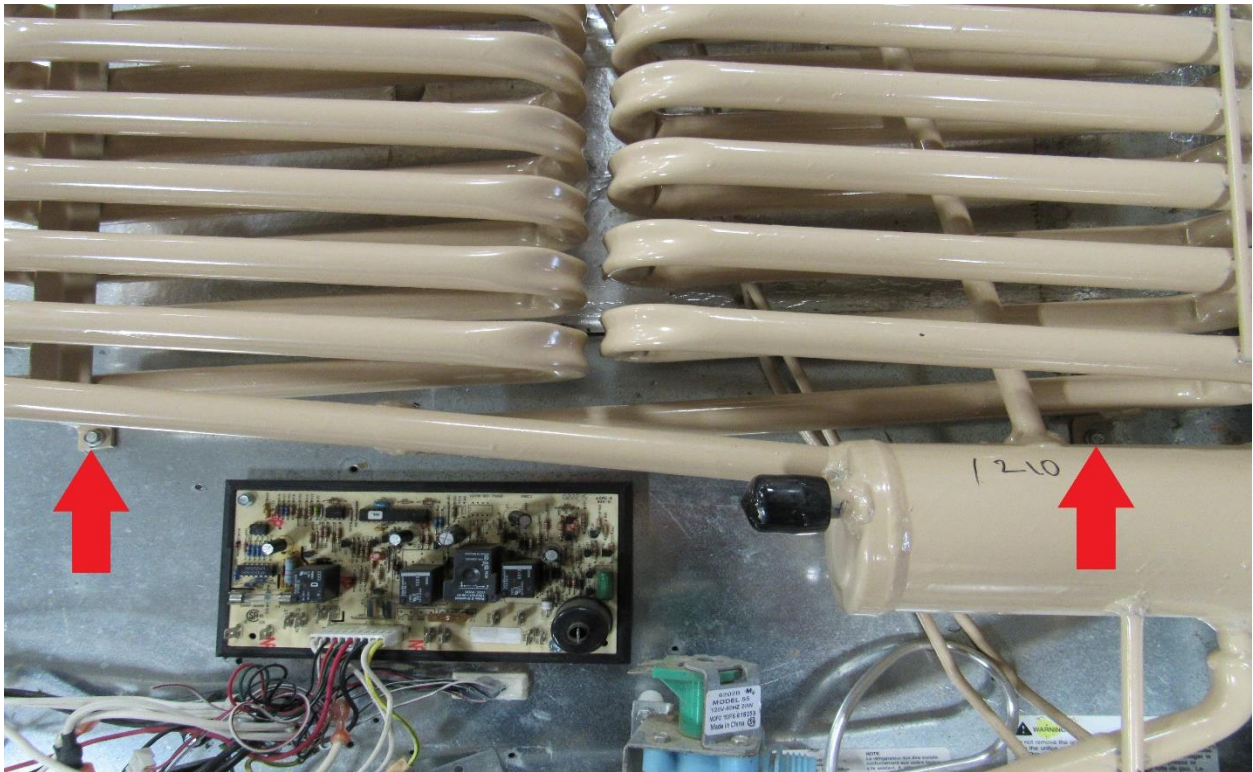

Set refrigerator in upright position.

If holes are not aligned have the rear person remove the top mounting screw and shift the unit side to side until holes are aligned, or if alone you have to set fridge back down, take out mounting screws and adjust the unit to where the holes line up. It does not have to be perfect, just close enough where you can see the edge of them. Don't be afraid to sand or shave foam off the side, top or bottom to let the unit slide the way it needs to go to line up the freezer screws. Pictured below is an example with the holes just visible.

⚠ Warning: The box holes can be redrilled or enlarged to make holes line up and then the washers can cover the hole.

But do not ever drill new holes into the cooling unit plates as you will hit the cooling tubes causing a rupture. If part of holes are visible you can either leave them as is since unit will be sealed in the back or you can use white silicone caulk to cover the holes.



When holes are lined up, install 8 freezer screws (**RA**), using the supplied screws in the parts bag, pulling the unit tight against the back. Do the same with the refrigerator section fin (**RA**). Install seven screws pulling it tight.






Warning: Make sure this step gets followed precisely, otherwise your fridge is unable to cool properly

Lay fridge back down, take the can of foam from the parts box. Shake can for a few seconds and apply a bead of foam around all four sides as shown below. Make sure and seal all cracks and gaps. This will help seal all air leaks while traveling down the road. Your cooling unit will not work properly if this step is not done properly. In the hard to get to areas you will still need to insert the foam along this edge.




In some areas it might seem to be tight against the box, and in this area cut back enough foam on a angle to create a small gap off the unit so you can get your foam straw in to fill the void further down. **We cannot stress enough on this step because if even a small 2" gap is left open it will not cool in the fridge like it should.**

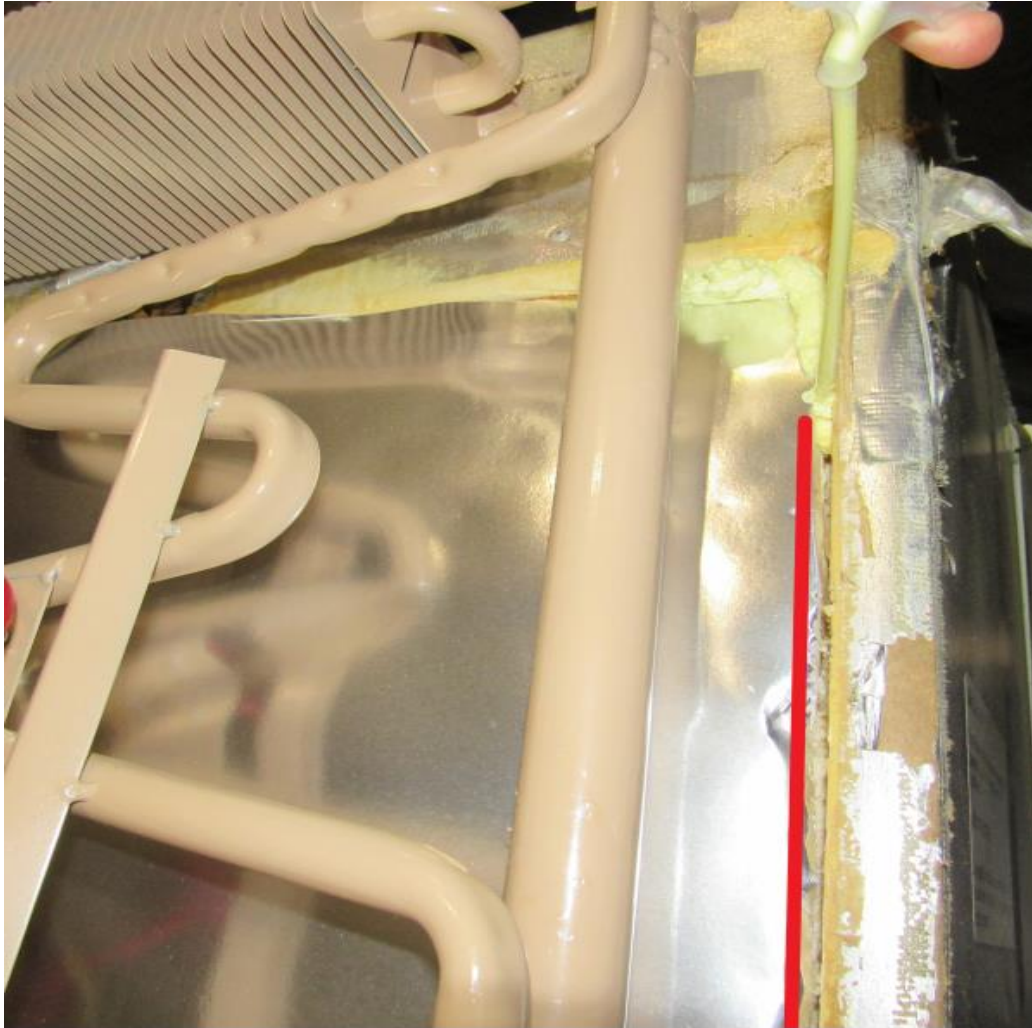

After filling all gaps with foam, follow up with covering the edges with the supplied aluminum tape. This does not serve as a seal but for cosmetic purposes only.




Plug the heating element wires into the board as shown. Black wires into the board spades marked AC HI LO (**RA**) and plug the yellow wires into the AC HI HI spades. If you have compressed air now would be a good time to blow air thru the board area to clean any moisture or dust off the board

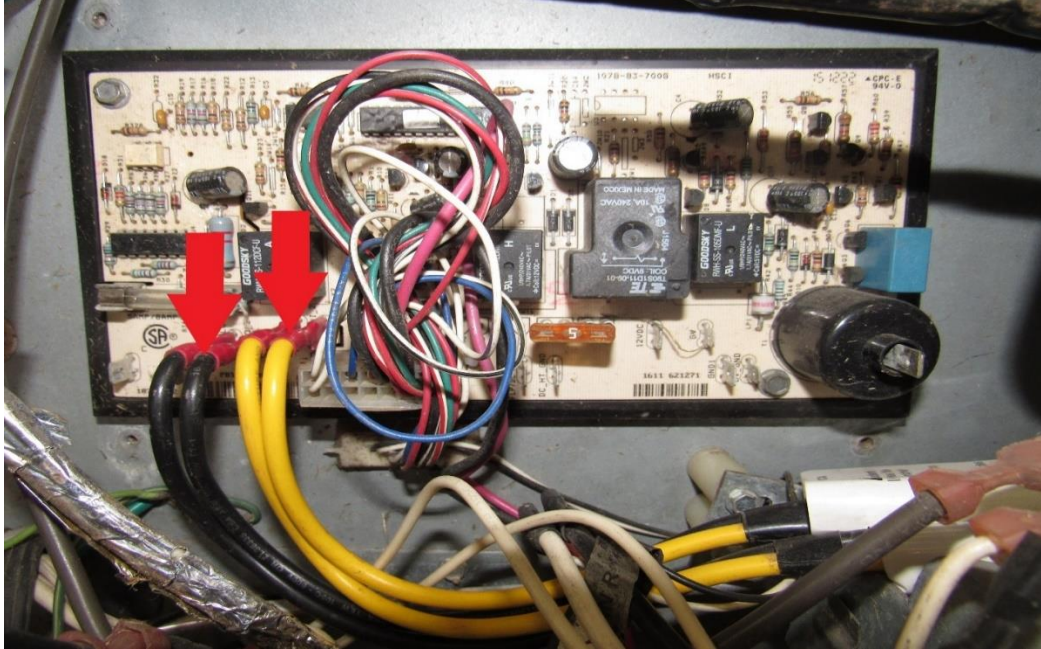


Reinstall board cover and put the ¼" screws back in (**RA**)




Install the three screws into the LP solenoid valve as shown.

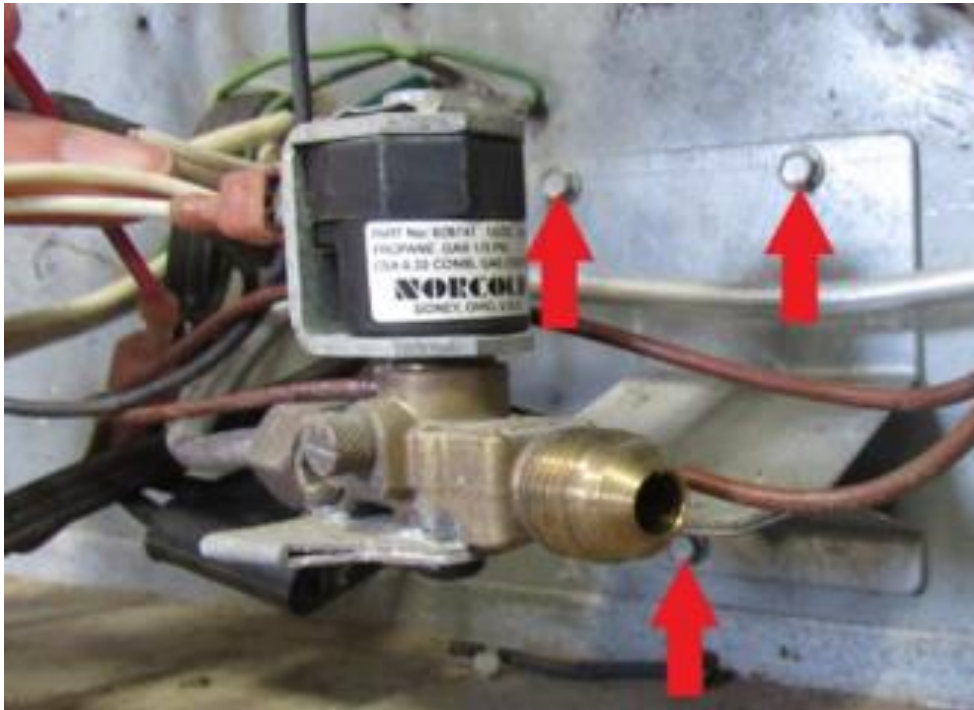


Plug the 2 gas valve wires back into the gas valve (RA)

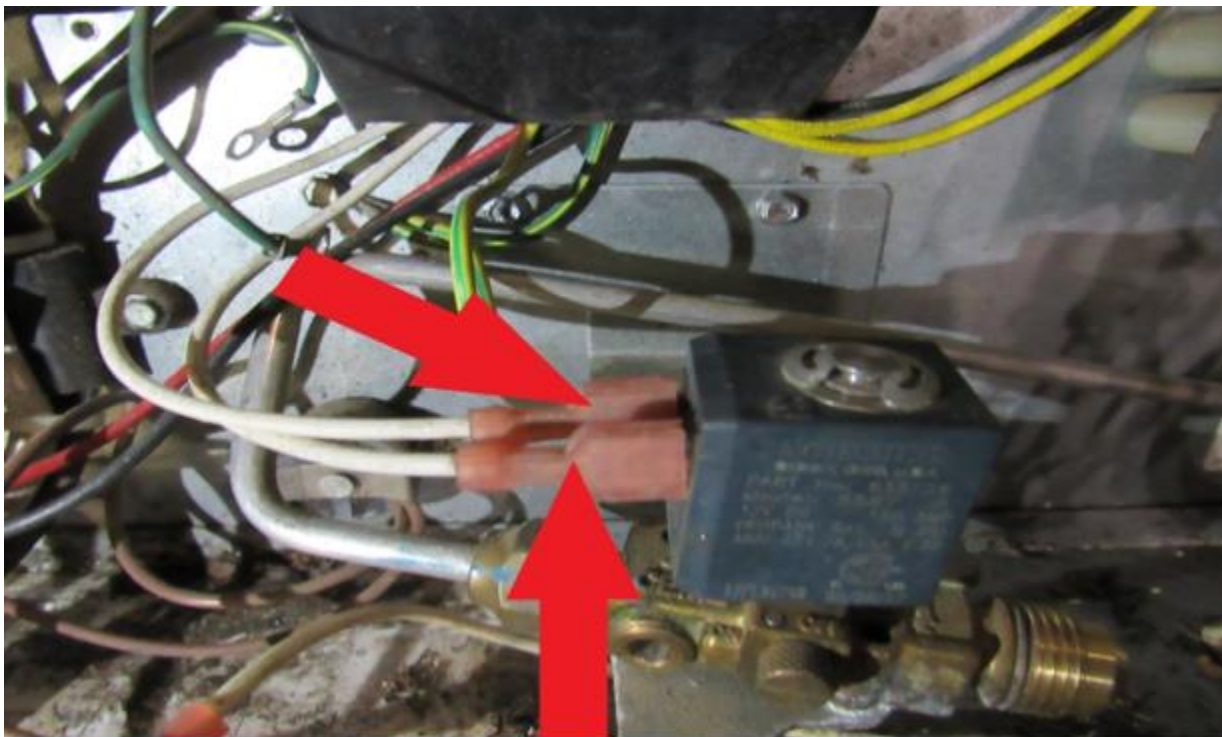

Install the defrost cup as shown, and secure it with a self-taping screw (RA).

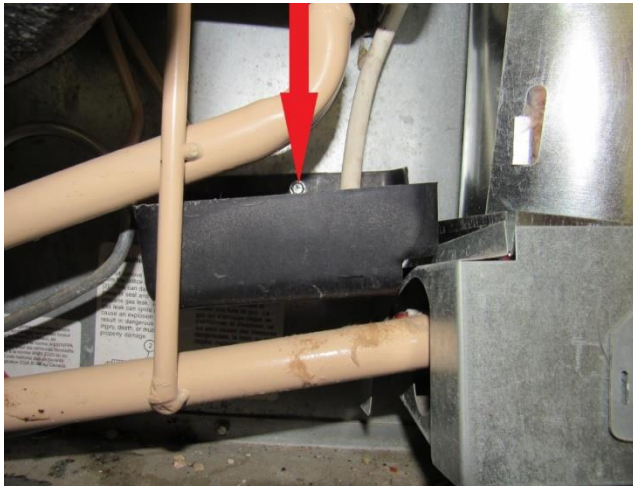

Plug in the black 120V cord into the bottom left corner (BA) of the board, plug in the 2 fan wires, (GA) make sure the black is on the right & white on the left. Plug gas valve wires back into board spades marked GV & GV GND (YA) Plug igniter wire back in (RA)

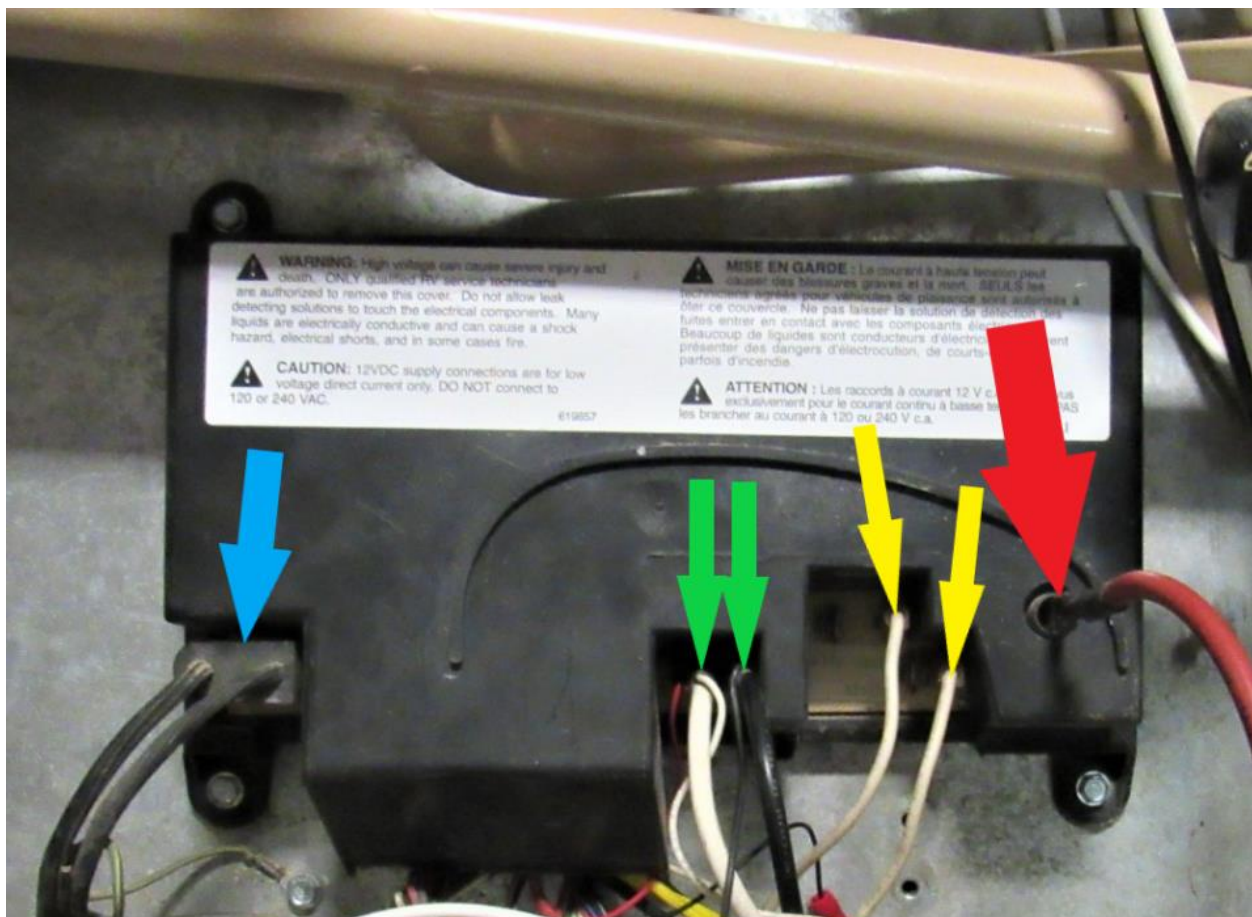

If you removed the ice maker, skip the next step.

The four ice maker wires coming from the top have a brown, black, white and green.

The green wire gets grounded to the box (**RA**).


The black wire plugs into the white ice maker power cord (**YA**).

The white wire plugs into the white ice maker power cord (**BL**).


At times the ice maker plug in is split off the main board plug, and if that is the case then you will not have a white cord, but the hook up will still remain the same




The white/or black power cord has a pigtail coming off of it and that plugs into the ice maker solenoid (**RA**), along with the brown wire (**YA**) as shown.

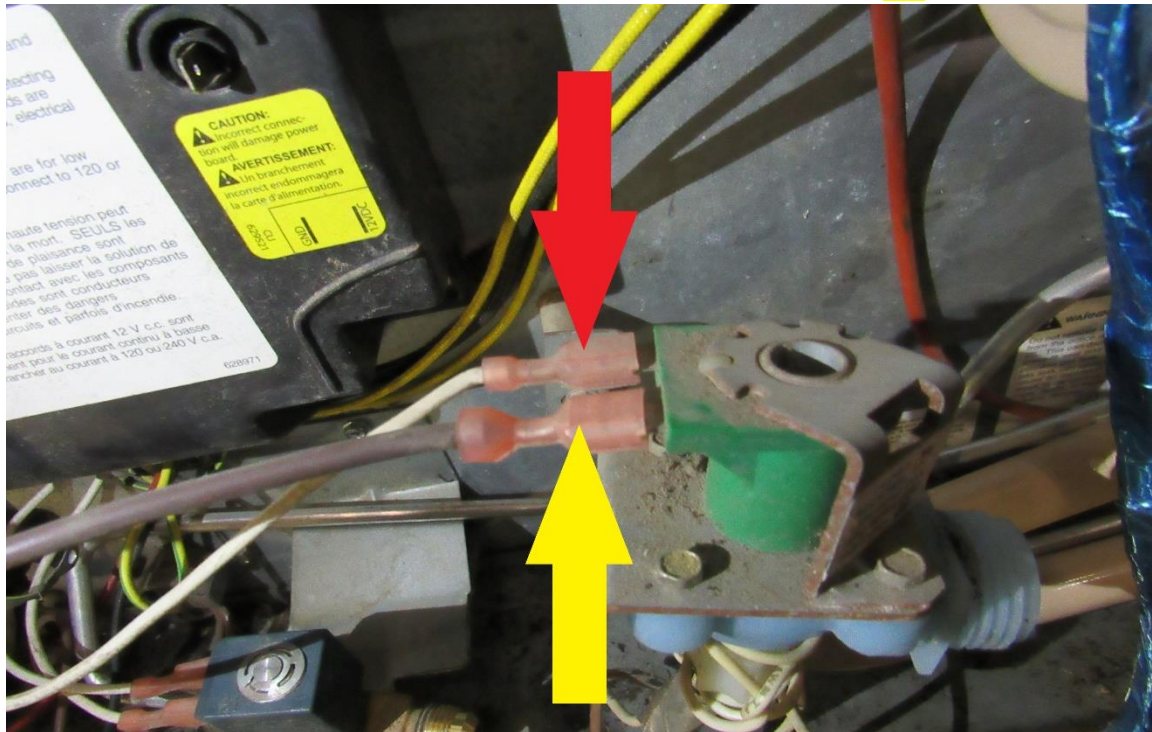


Connect the ice maker hose to the solenoid (**RA**).

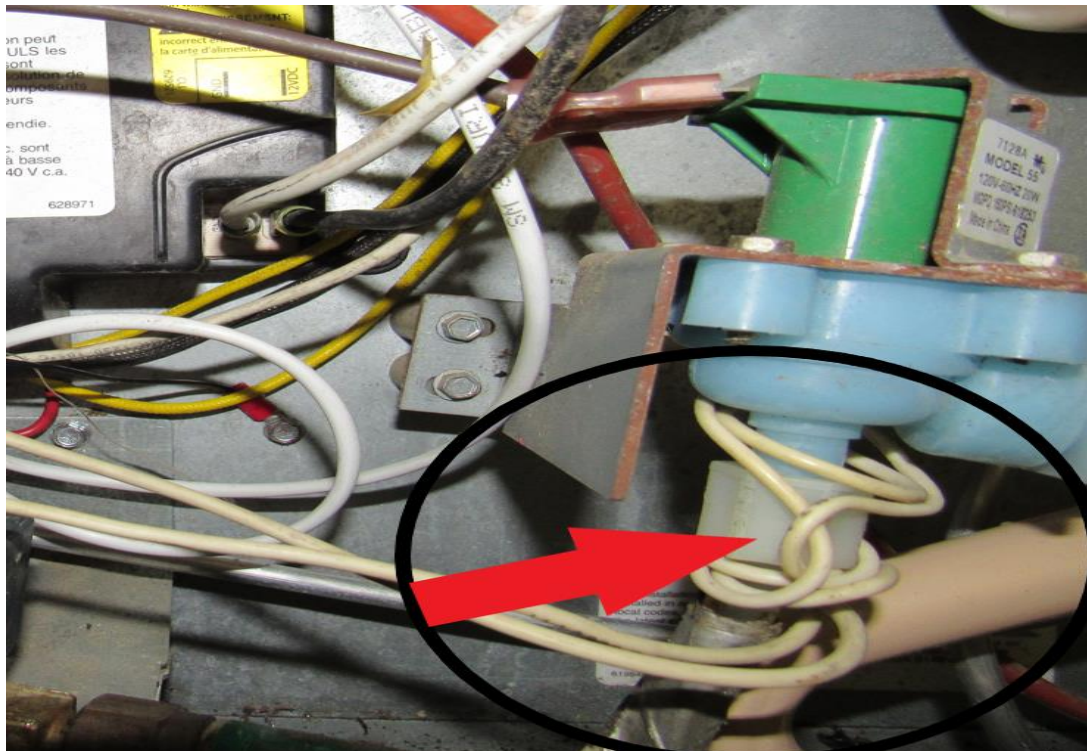


Now we need to connect the two white heater wires that run with the ice maker water hose. Connect one into the brown wire (**RA**).

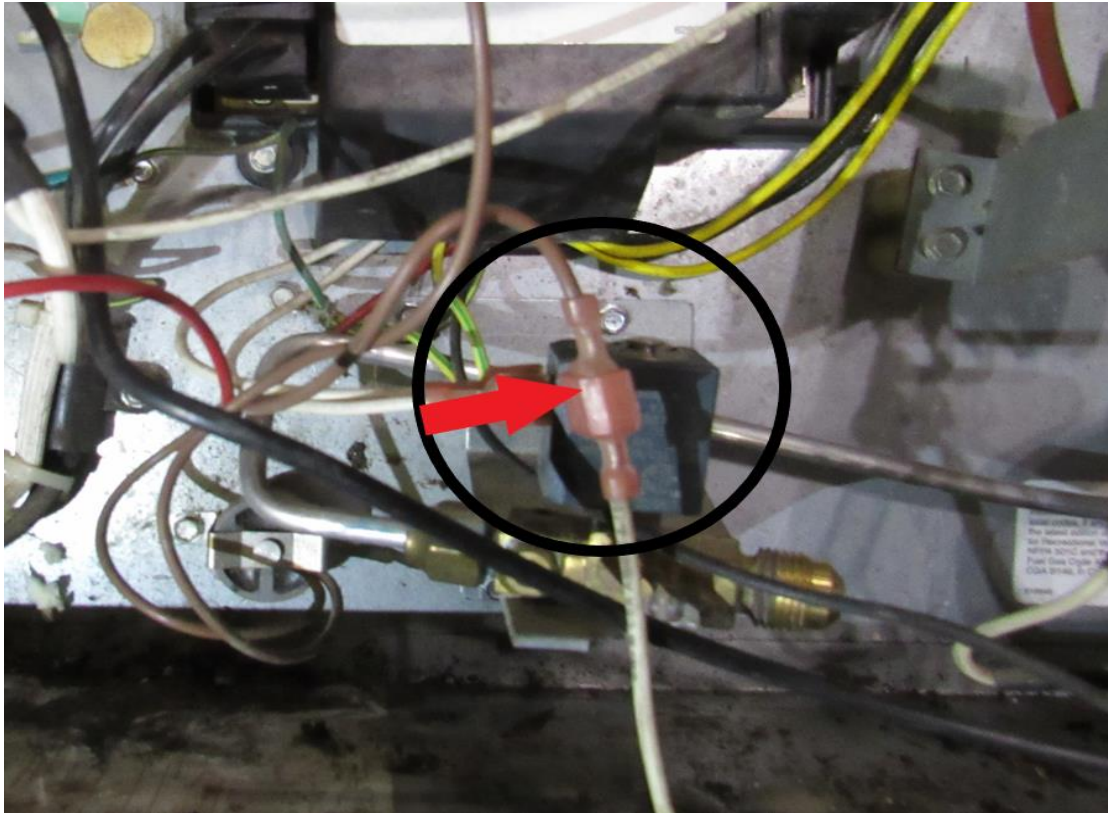


Connect the other to the black wire (**RA**).

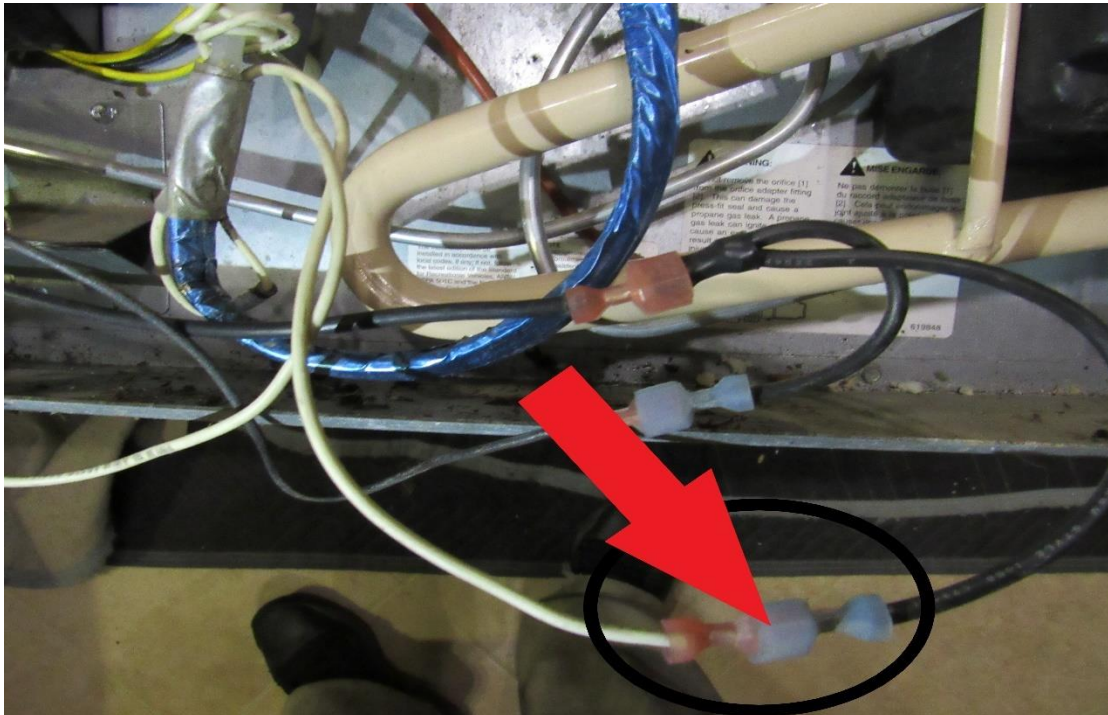


Or if everything was disconnected, this can get complicated, so you can use this as a guide to wire up your icemaker waterline heater as well, if you are not travelling in temps below 32F then this step does not have to be used. 2 brown thermostat wires blue circle.

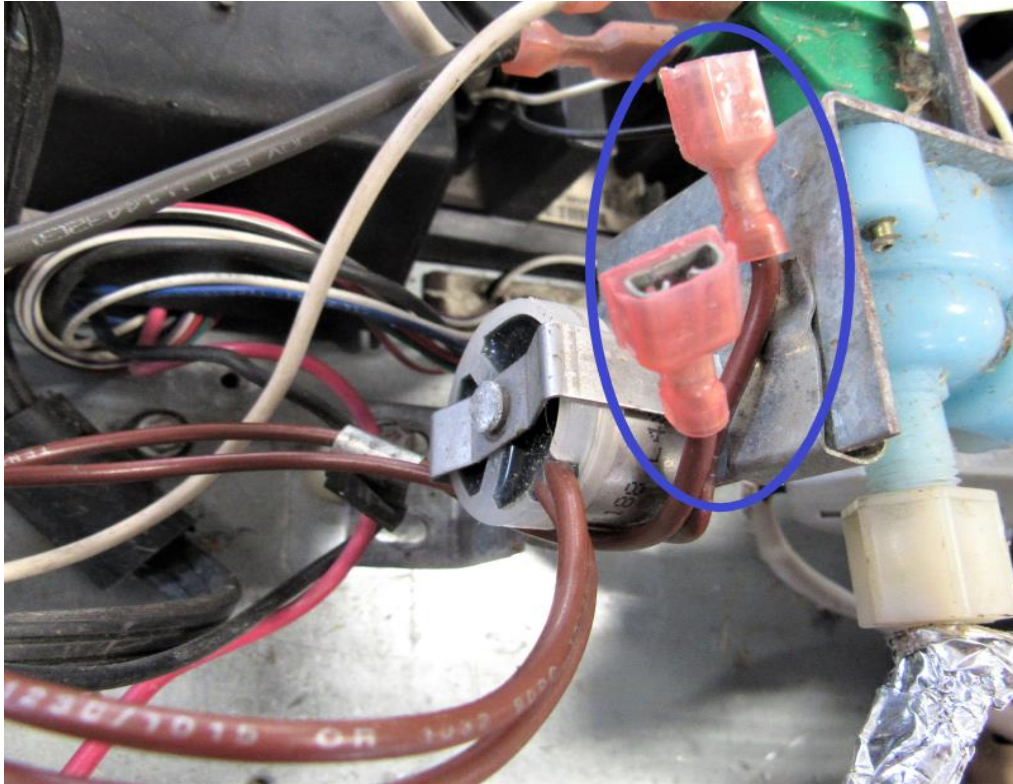


2 red and black 12V DC power wires coming from the board. Yellow circle, these are the same wires that took power to these wire before

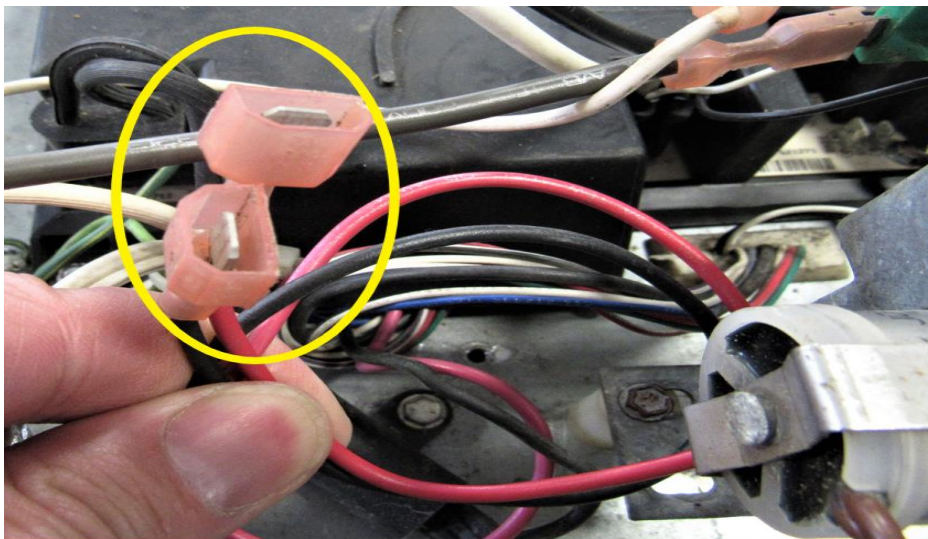


These 6 wires need to interconnect, wires are color coded to previous pics.

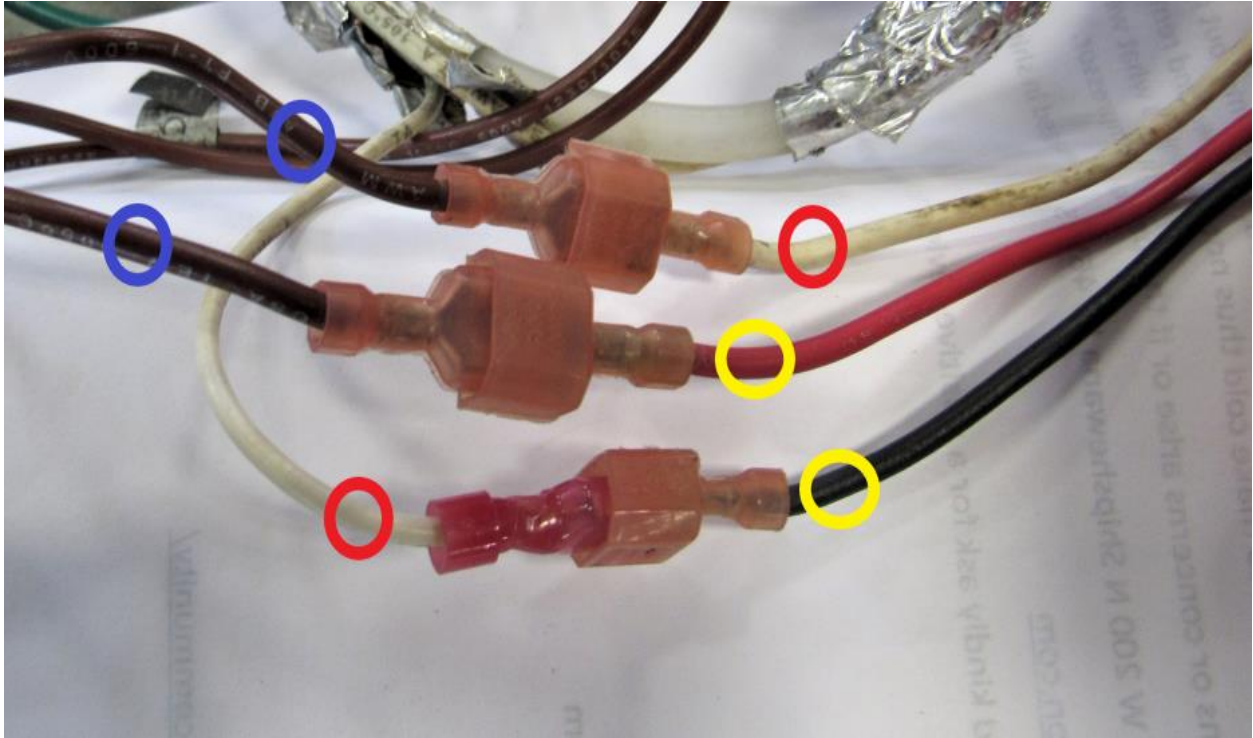



Mount the fan switch onto the plate marked fan switch using the 2 small screws taken out of the old unit, do not locate the fan switch up on the fin as the old one was

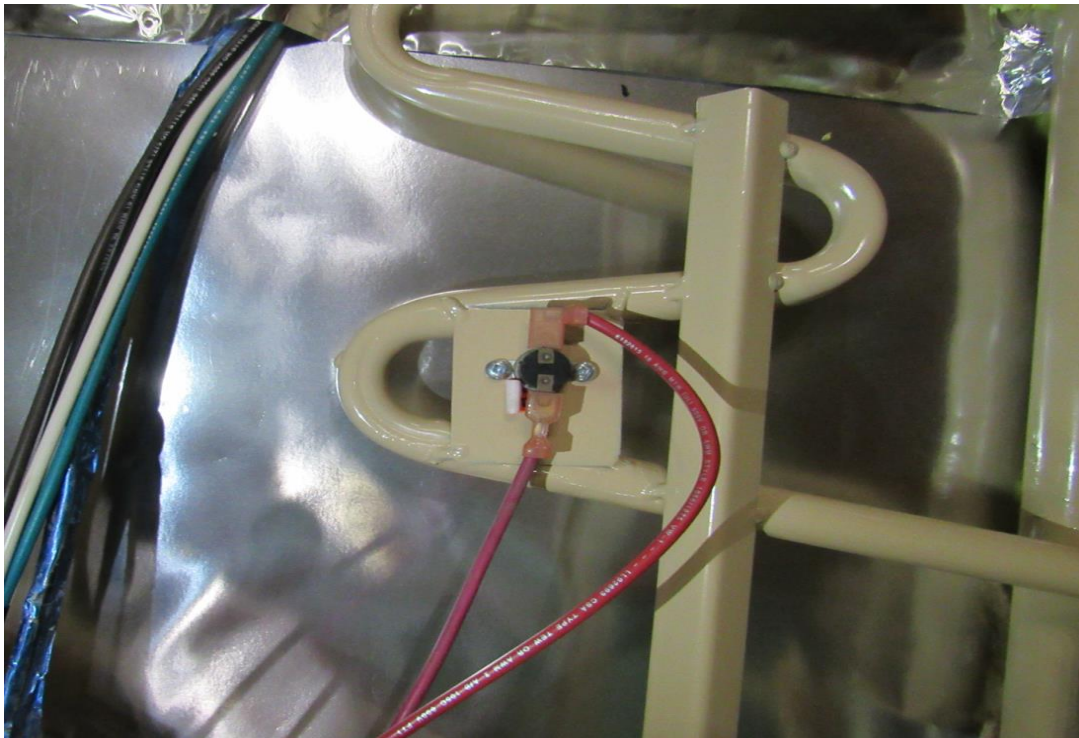


Locate your ventilation fans. Remove the 4- ¼" screws on the fan bracket (**RA**).

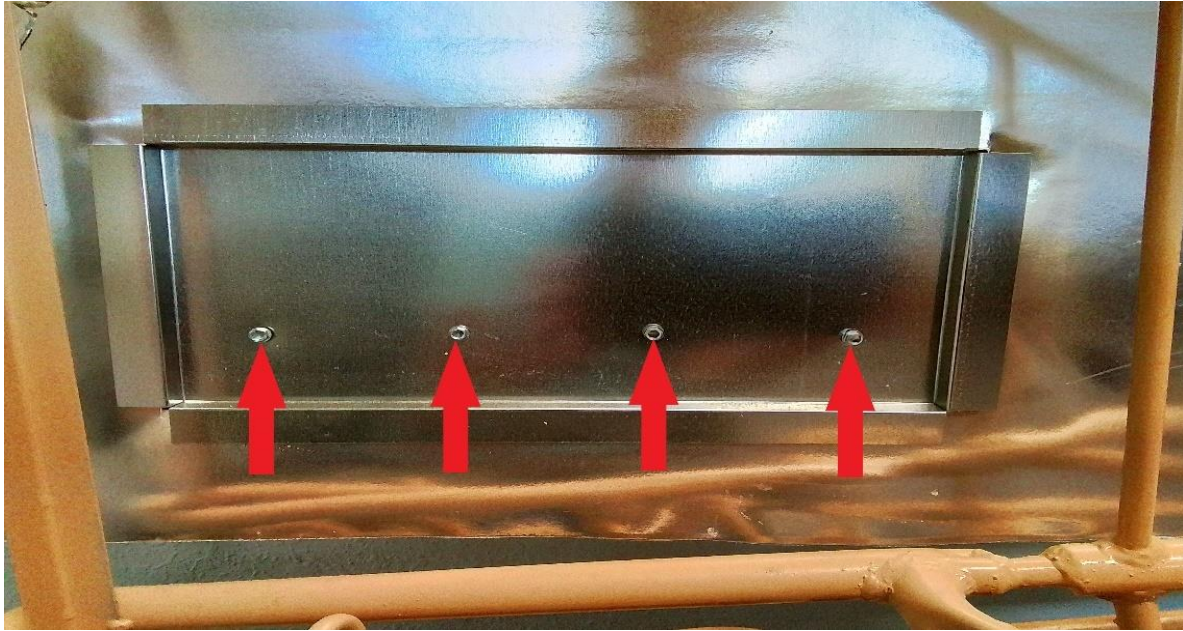


Place the fans facing up and install them using the provided screws (**RA**). Make sure the sticker of the fans are turned up, use only the holes that were there from the screws taken out do not make new mounting holes into this fan plate.

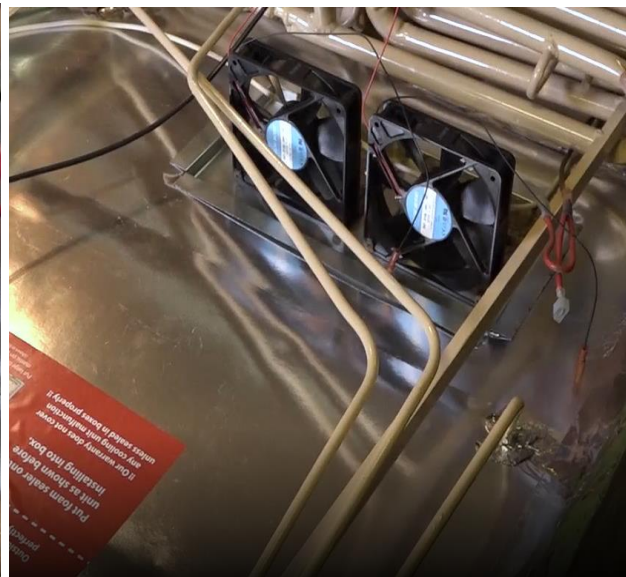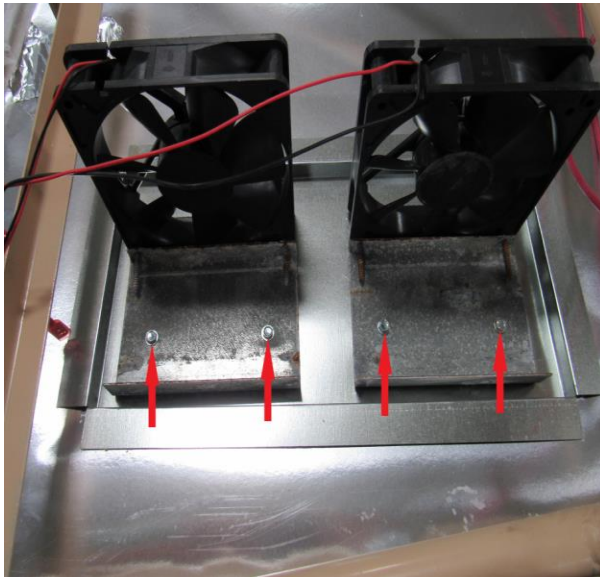

The black wire coming from the fan switch has a 3-way split. Plug the red fan wires into that as shown (YA). The white wire is the power wire coming from the board to the fan switch. (RA)

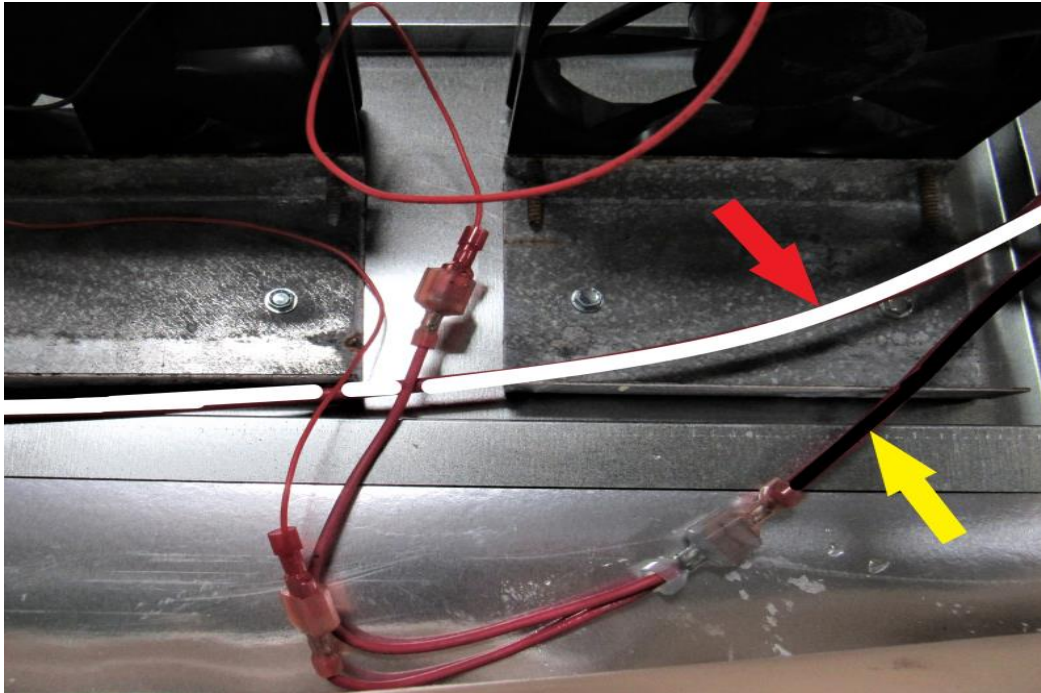


The black wire coming from the control board that originally powered the fans gets plugged into the fan black wires as shown (RA).

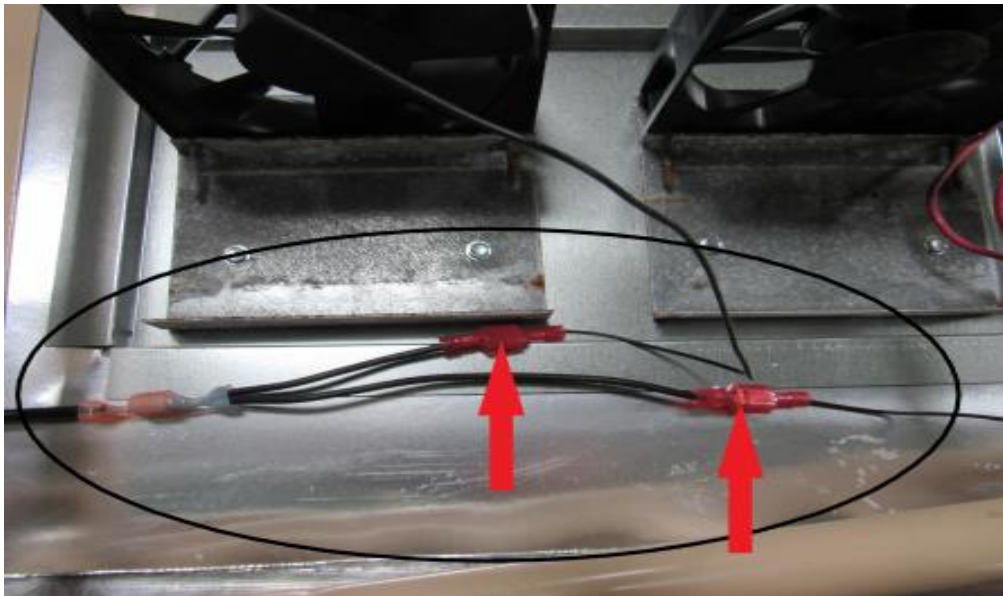


Zip tie any loose wiring including your icemaker wiring and hose, fan wires, and control board wiring.


Stand the fridge back up and level the top fin with the top of the box, if its off then you will need to remove the bottom 2 mounting screws you can push the unit to the side it needs to go to make it level with the box, normally it will not take much to get it close, it does not have to be perfectly level to the box, as long as the bubble of the level is within the lines you are good. Do not remove freezer or fridge screws to move the unit as these screws need to stay tight, and pushing the unit to the side will not put extra pressure on the tubing, remember these units are made with thick steel tubing.

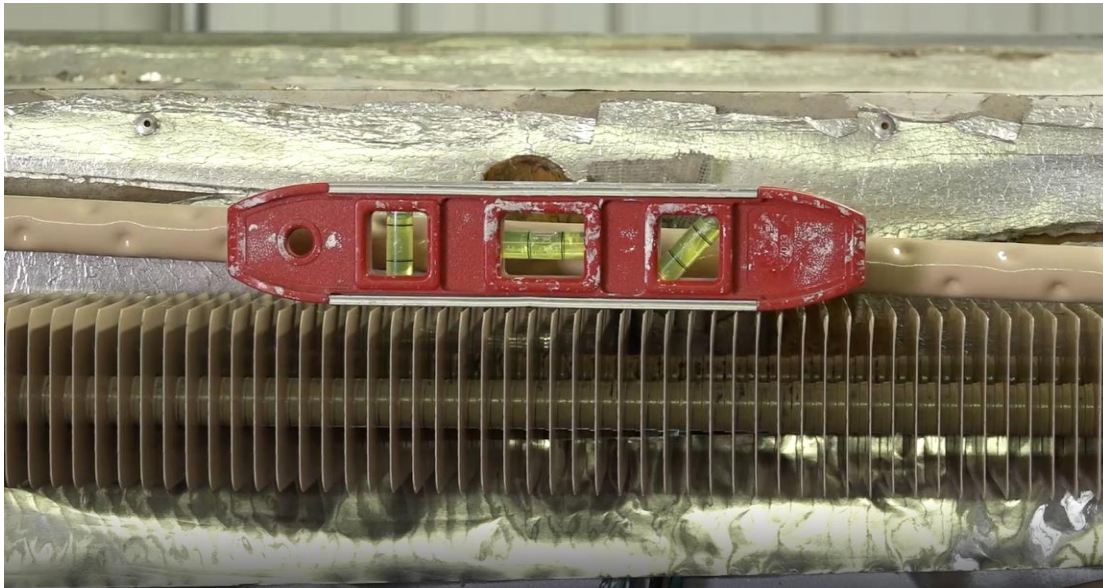

after you have it where you want it add the top left and right screw to the box
(RA)

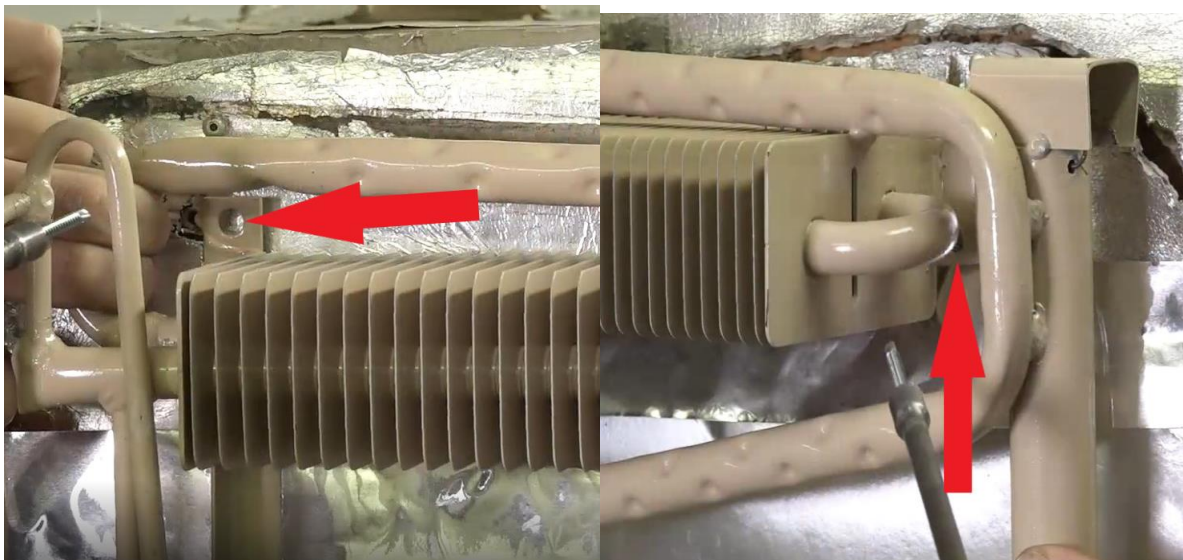


Before installing the fridge back into the cavity, check to make sure wall insulation is secured and this is a good time to sweep or vacuum any loose debris. If this fridge is installed into a slide out then make sure and remove the top side vent (YA) baffling (RA), as you will no longer need this and all it will do is slow air flow.

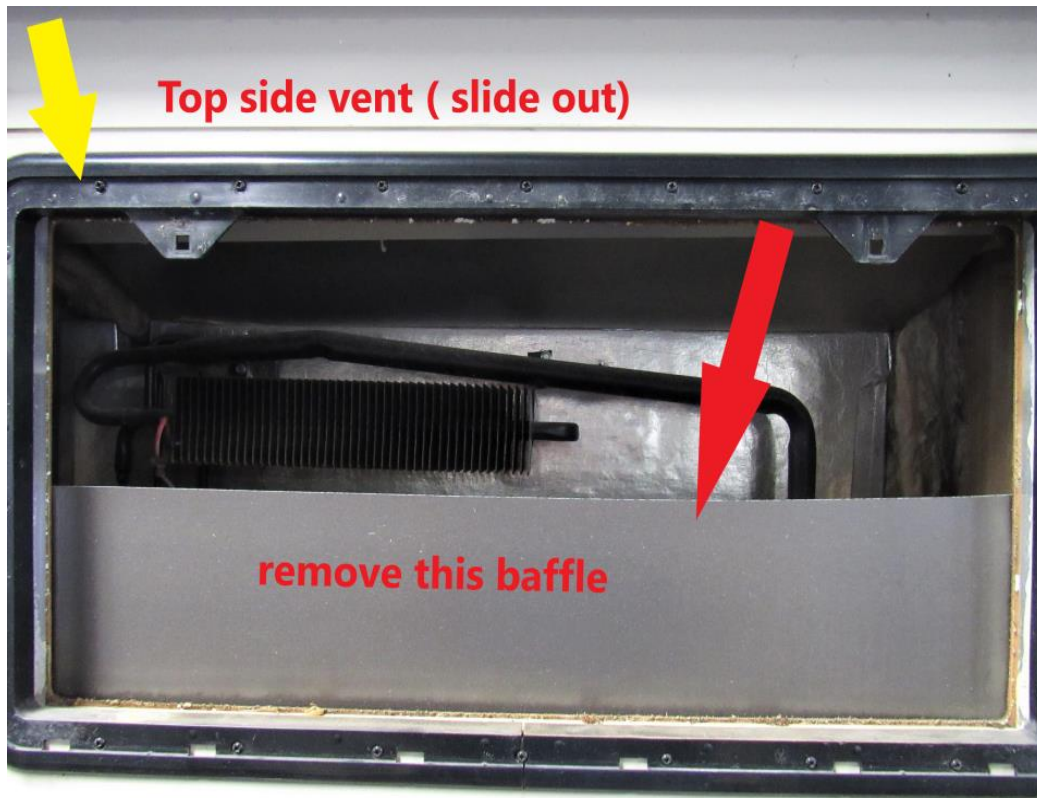


It needs to look like this, wide open vent



You will then be required to add a slideout fan to your top side vent to force the hot air out that's being pushed up from the fans below the vent, **(this is required on all slide out models to be covered in our warranty)**

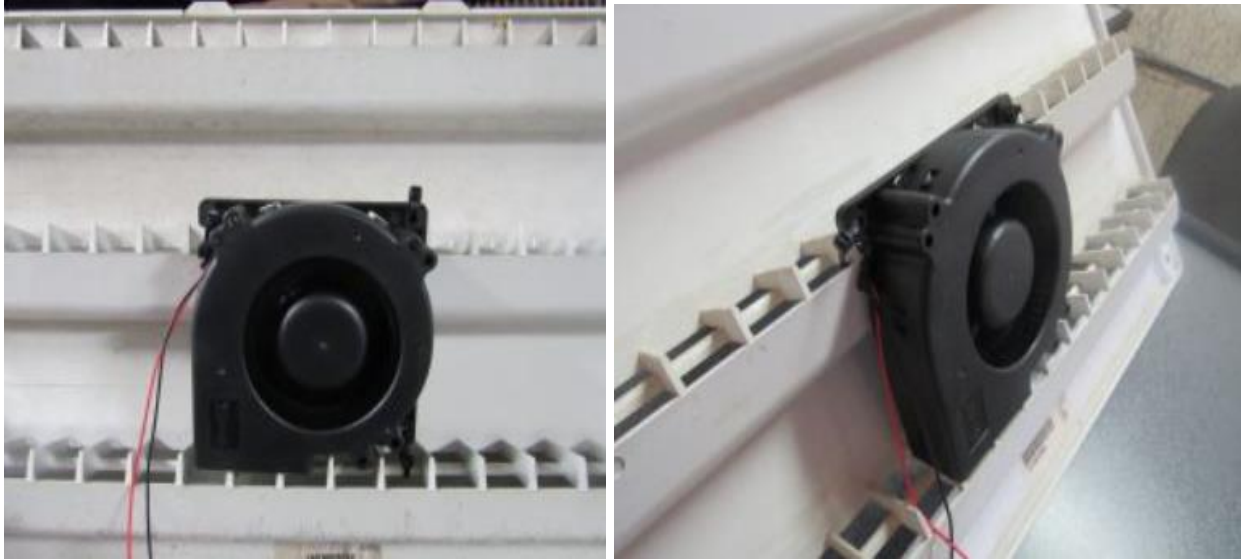


The eyelet can be screwed at any ground, connect female + to the fan switch wire, so it comes on when the lower fans come on

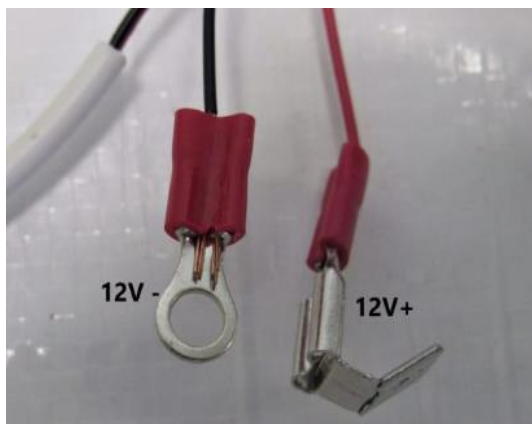


<https://jc-refrigeration.com/product/slide-out-fan-kit-u/>

this does not have to be our fan, but a fan

has to be added to the top vent.



If It's installed into a roof vent style, then it's a good idea to remove the top cap once done to remove any debris or just to make sure its wide open. Also check the top cap rain guards (BA), these can swell out with time and heat and cause serious air flow restriction, you can cut off ½" of these rain guards to give more air flow if they are restricted. If your cap is a aftermarket "Camco" cap then the rain guards have to be cut completely off as these caps are not made for your fridge vent.

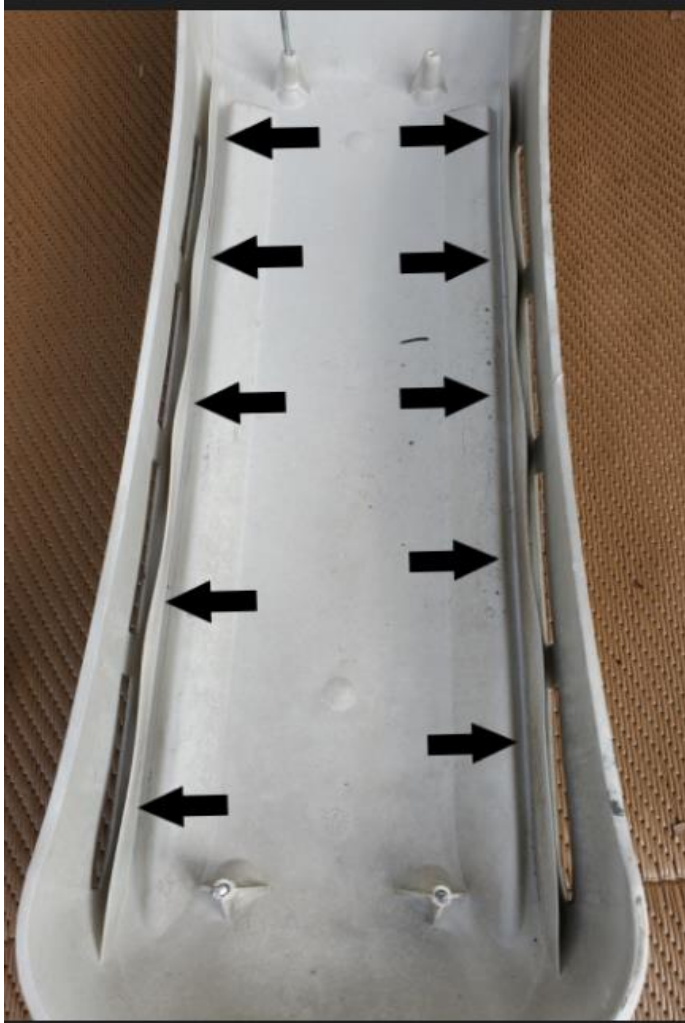

Now you're ready to slide the refrigerator back into the cavity. Once it's started it helps to have someone outside to watch as you slowly push the fridge back into place, making sure the gas line is out of the way. Attach black trim pieces on top and bottom. Install mounting screws (**RA**) on the top and bottom.




Now we are ready to finish the outside. Put the two mounting screws (**RA**) back in place. Or if your coach is a Winnebago, put the four bolts back in.




WARNING: Make sure this step is properly followed and leak checked so you don't have a gas leak.


Connect the LP gas line to the LP solenoid, turn on the LP at the tank and leak check with soap and water. **MAKE SURE YOU DO NOT HAVE A LEAK** before continuing.

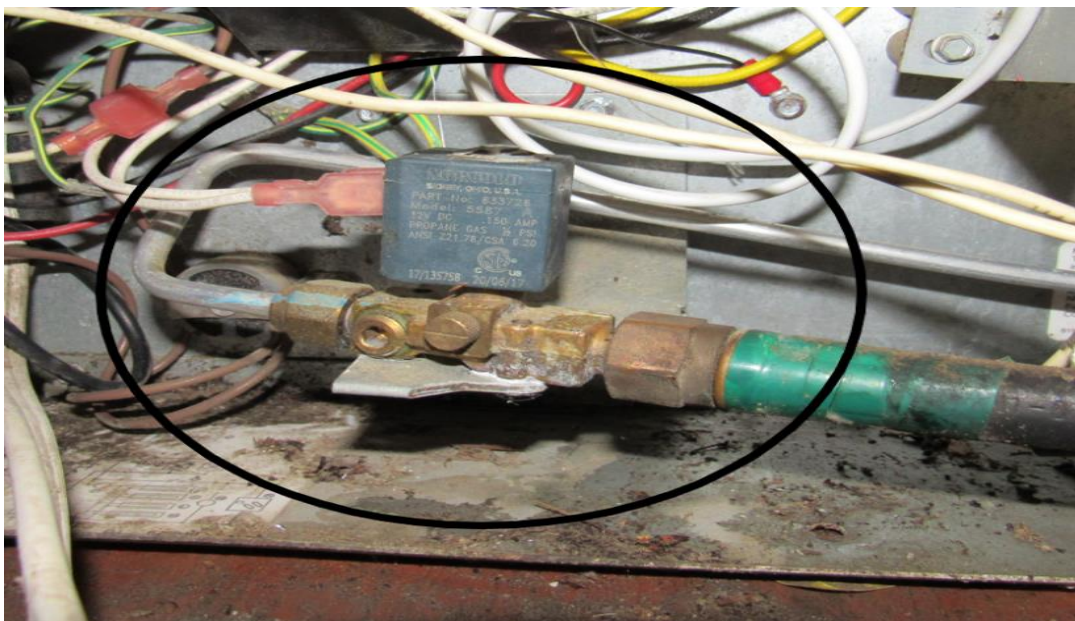


Plug the 12v wires from your coach into the board, Negative (GND1) is on the right (RA) and Positive (12VDC) is on the left (YA).

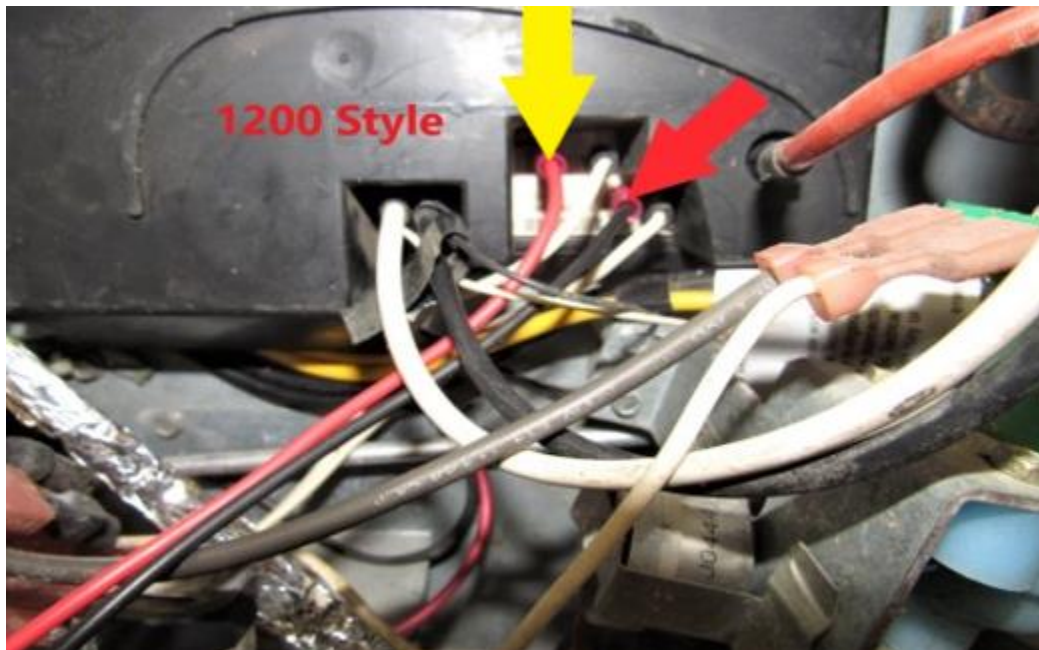

Go to the inside of your RV and turn your refrigerator control "ON" (RA) now push the mode button (YA) and set it onto Auto mode. You can now adjust your temp setting (BA) to your desired temp, we recommend setting it onto 4 and then after approx. 24 hrs. adjust up or down to your desired temp inside the fridge. Food zone is 38F to 40F, and in the freezer 0F to 10F, if you have it much colder than 38F your ice on the fin will accumulate very fast.

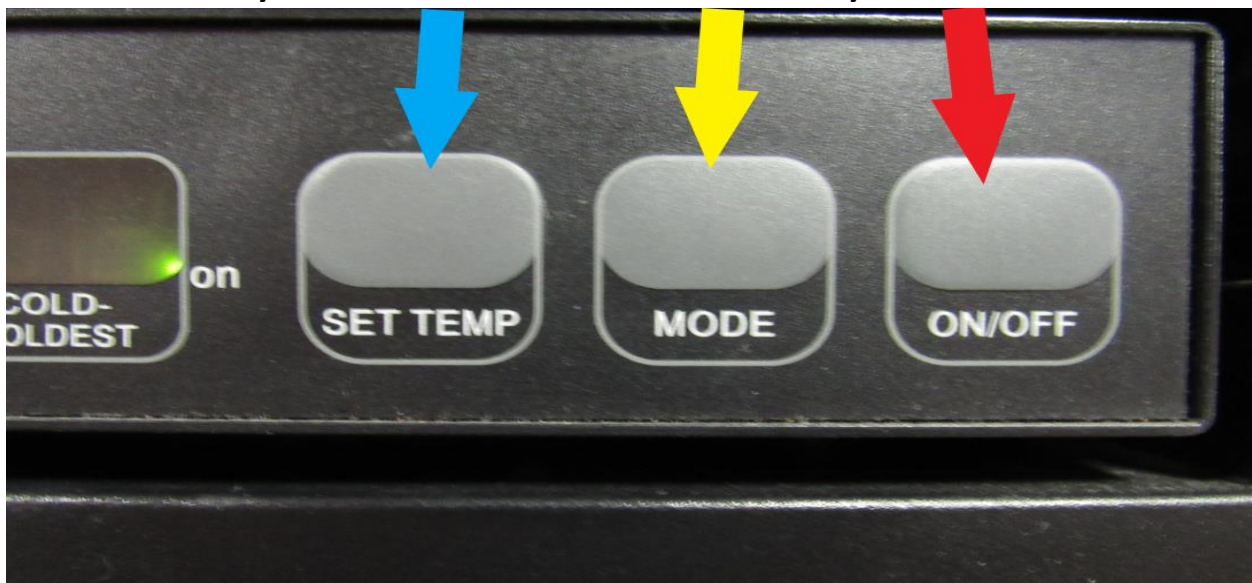


Keep the electric cord unplugged for now, once the LP burner is lit go back out and check for a gas leak (**RA**) this gas line nut will be partially hidden but can still be seen and checked with soap water.

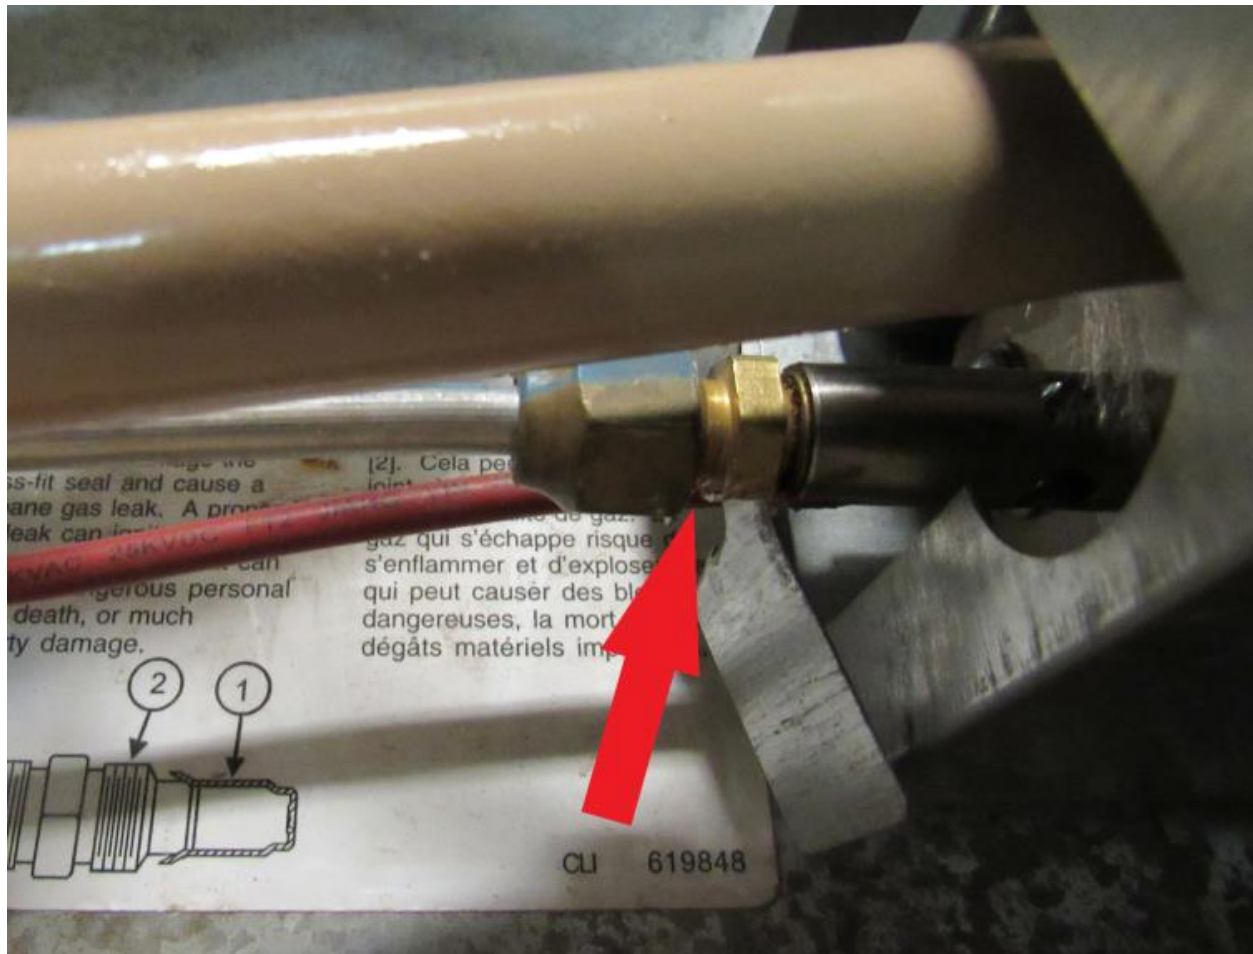


Now plug the electric cord into your plug in, and the eyebrow board should switch over to AC, if you have a amp clamp the total amps between the 2 heaters should be 3.6A to 3.8A. After its been running for ½ to 1 hr you need to make sure you here the rear vent fans turn on. Which can be heard either thru the front fridge door or thru the rear side vent

Check your left-hand door flapper, this can get shifted in this new unit installation process and may need to be readjusted. There normally are 2 or 3 pivot points that should be lubricated with silicone or WD-40, and make sure it swings freely by hand, with the right-hand door open watch as you slowly close the left-hand door, this flapper should freely snap shut all the way closed. If it drags on the top you need to take out the top hinge pin and take out the lift washer out of the bottom hinge pin, if it drags on the bottom you need to add a small washer to lift the door slightly.

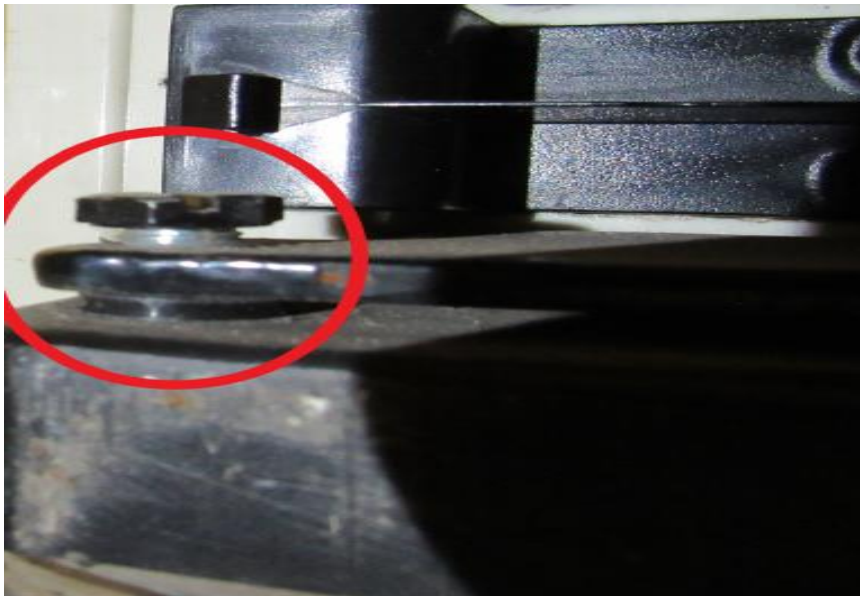

Now slowly close the right-hand door and watch between the 2 doors with a light and the right-hand door should not hit or scrape this flapper. If the right-hand door hits the flapper it needs to be adjusted on the right-hand door hinge to swing this away from the flapper. The procedure is for top and bottom hinge. Remove the (YC) screw and loosen the (RC) screw slightly, now slide a small washer between hinge and box and put the (YC) back in and while pushing the hinge as far to the right as possible tighten all screws back in top and bottom hinge.

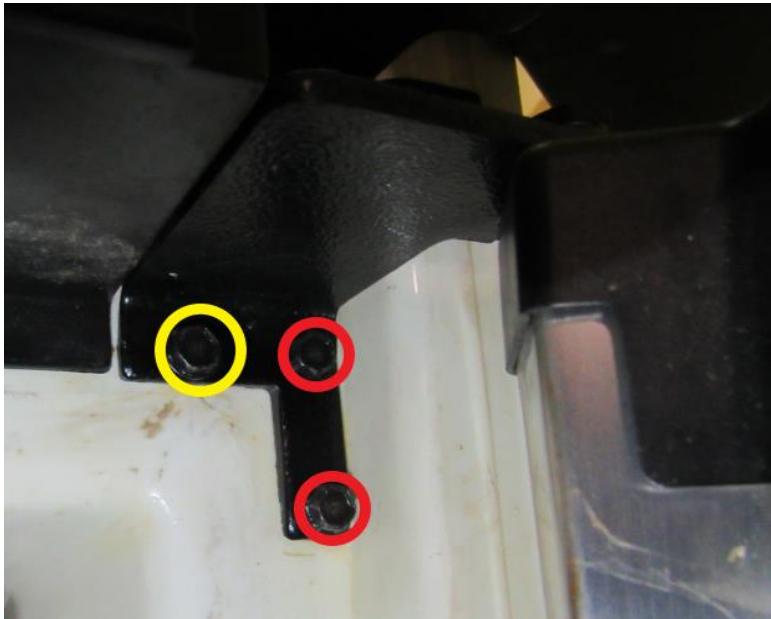

Fin fan Operation

If you installed the fin fan, it should remain running whenever the fridge is powered on. If it is not, try flipping the switch on the fan to the opposite position to see if it will operate then. The normal position for the fin fan is to have it centered on the fin (left to right) However, if you have frost starting to build up on one side or the other of the fin fan, move the fin fan over so that one of the small fans is positioned directly above where the frost buildup is.

The thermistor should be located on the 2nd fin from the right side.
(See above picture, yellow arrow)



Note: If you installed an adjustable thermistor, <https://jc-refrigeration.com/product/norcold-adjustable-replacement-thermistor-free-shipping/> your temp setting on the front display panel will still be in effect as well. A good starting point is to set the front display to 4. Then set the adjustable thermistor to the middle setting (12:00) and let the fridge run for at least 24 hours then make changes on the adjustable thermistor inside to dial it in to your desired temp.

We highly recommend using a digital wireless thermometer to monitor your inside fridge temps. Temperature misleading's can be avoided by making sure the thermometers you are using are accurate. You do not have to use our brand but we do recommend using something similar to this type.

<https://jc-refrigeration.com/product/refrigerator-freezer-digital-wireless-thermometer-free-shipping/>

Use digital wireless



DO NOT USE



Clip the sensor for the fridge underneath the first shelf beneath the fin, place it so the sensor is centered, front to back and side to side (**RA**). If it's clipped underneath it will be out of the way and shouldn't interfere with storage.



The same applies to the freezer, clip the sensor underneath the shelf, centered from side to side, but have this one more towards the back of the freezer.

Troubleshooting

Error Codes:

"NO FLO" or "No FL": #1 LP gas is not turned on or there might be air in the line. Turn the refrigerator off, wait a few seconds, and turn refrigerator back on, #2 the igniter probe is too close or too far away from the burner tube. #3 your board has gotten wet and needs to be blown out with compressed air.


"NO CO "Code

This is a code is the fridge does not drop in temp in 4 hrs., make sure your fans are running and the cooling unit is getting warm in the back, see temp chart for temps and location.

This code will shut down the control board and a restart is needed, see diagram below how to restart

-Remove board cover and if you had to unplug any wires in order to remove the cover, plug those back in as you want everything plugged in the way it would normally be. Take an 18ga or smaller wire and strip back both ends at least 1 ", make sure 12V power and gas valve wires are hooked up, **and make sure board is turned on**, then push one end of wire in empty slot (**YA**) and hold other end of wire onto a ground, either back of fridge box or ground from coach, after approx. 5 seconds you will hear a click and you can take wire back out and put cover back on as well as other wires and your fridge should function as normal again.

Resetting Control Board

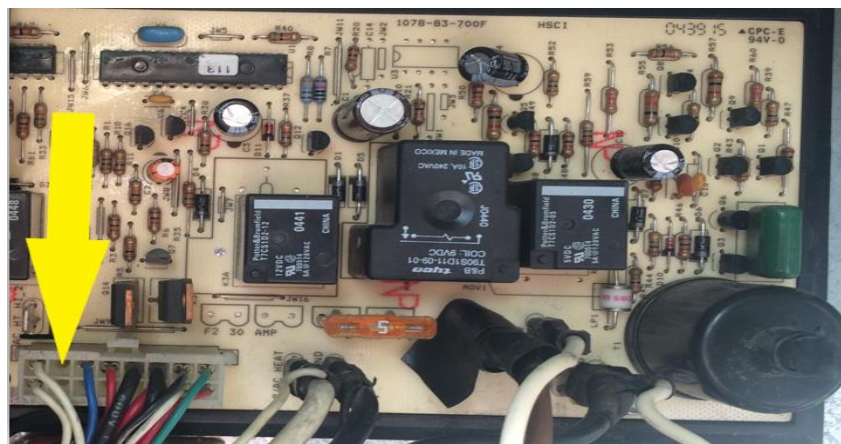

"NO AC" CODE

#1 your electric plug in is not hot, check your breaker box, make sure you do not have the fridge plugged into the inverter or icemaker power outlet

Thermistor check

Push and hold the "set temp" and "mode" button in at the same time. After 5 seconds you will see a 1 or 88. Now push the "mode" and scroll up to 3, this will then flash you your thermistor temp. This temp should be 25 – 28 for normal food zone depending where it's located on the fin, but it's very important that the door has been closed for at least 1 hr. before doing this test. To come back out of this mode, turn fridge off and then back on again. If you want to check the accuracy of your thermistor or your thermometer inside the fridge, unclip the thermistor from the fin and leave it hang into the box for approx. 1 hour with the door closed, then do this test and the thermistor and your thermometer should match up or be close the same.

If your controls are not operating correctly or the eyebrow seems to not be working, do this to reset all codes and this will refresh both rear and front board. Push and hold the "set temp" and "mode" button in at the same time after 5 seconds you will see a 1 or 88, now push the "mode" and scroll up to 6 this will then show a "ER", then push and hold the mode button until a "CL" shows. Let the refrigerator set like this for a least 5 minutes, then shut fridge off and turn back on and the fridge will be ready to operate again.

TEMP CHART

To do a diagnostic test on this unit we will need to know temp off of:

A: ambient temp

B: coil #1 & #2 Temp

C: Tank Temp



FAQs

What is covered under warranty?

Our warranty covers the cooling unit and shipping for 3 years free and labor for 90 days. An additional 3 yrs. can be bought off our website, which can be found on the warranty form attached to the unit. It does not cover any original Norcold parts such as the control board, the front display, thermistor, etc.

What if the cooling unit needs to be worked on and I'm not close to your location (Shipshewana, IN)?

Contact us first and we will try to help you get the issue resolved. Most problems can be fixed by us through email or phone but if more work, or hands on work is needed, we have a list of dealers/service centers in almost every state that have purchased cooling units from us before and could possibly help you out.

Is there any regular maintenance to perform on these cooling units?

The only thing that needs to be done on these cooling units is to take compressed air and blow any dust or debris out of the burner assembly. This can be done maybe once or twice per year.

What makes our unit better than the original: We use much thicker tubing for one and our boilers are all hand welded which will prevent stress cracks (leakers) and we attach another coil which makes it double cooling capacity.

What is the best method to reach us for questions or concerns: email will be the fastest responds, a phone call without pictures of what you have will most times only delay the proper answer to your question. Emailing us a picture with the question will get you the fastest answer info@jc-refrigeration.com

How long have you been manufacturing these: we started servicing in 1991 and manufacturing in 1994

Is it true that these should be perfectly level: Yes, these can be off by 3 deg max in order to work, if they get off level more than 3 deg they will shut down and the boiler will create damage very quickly by over heat. This is a gravity flow system, so while travelling it's not a problem and it will slosh enough to keep going, it's while parked that it

